

Achieva®




Project Name

Spec Type

Notes

Suspended
Direct/Indirect
2 T5HO

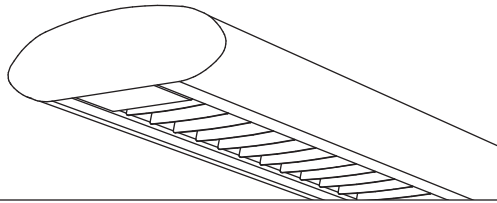


Order Guide


Some combinations of product options may not be available. Consult factory for assistance with your specification.

8816	H02			-		-		-			
Product Series & Type Achieva Direct/Indirect	Lamping 2 T5HO	Lower Optics W White Louver (34*) P Semi-Specular Louver (15*) S Specular Louver (15*) M Semi-Specular VDT Louver (30*) R Specular VDT Louver (30*)	Upper Optics N None D 60% Down Kit G 80% Down Kit J 100% Down Kit U 80% Up Kit	Run Length <i>Enter the total run length in feet (4ft increments)</i>	Wiring 1 1 cct 2 2 cct 3 1 cct w/ Emergency cct 4 2 cct w/ Emergency cct 5 1 cct w/ Battery Pack 6 2 cct w/ Battery Pack 7 1 cct Dimming	Voltage 1 120V 2 277V 3 347V	Ballast E Standard Ballast Consult website for ballast manufacturer information	Color & Finish W Standard White C Factory Color X Custom Color Consult website for color and finish options			
		* Number of louver cells per 4ft section See details on reverse		See details on reverse	See details on reverse	Consult website for complete list of standard wiring options	<h3>Mounting Hardware</h3> <div style="display: flex; justify-content: space-around;"> <input type="text"/> <input type="text"/> </div> <table border="1"> <tr> <td>Mount Type Consult separate mounting spec sheet for mount type options</td> <td>Suspension Length <i>Enter distance from ceiling to top of fixture in inches</i></td> </tr> </table>			Mount Type Consult separate mounting spec sheet for mount type options	Suspension Length <i>Enter distance from ceiling to top of fixture in inches</i>
Mount Type Consult separate mounting spec sheet for mount type options	Suspension Length <i>Enter distance from ceiling to top of fixture in inches</i>										


Upgrades & Accessories

Please indicate with check mark.

<input type="checkbox"/> Lamps Included	<input checked="" type="checkbox"/> Lamps Included and Installed
<input type="checkbox"/> Lamp Guard Not available with upper optics option U	
<input type="checkbox"/> Response Daylight (Integrated Controls) For details visit www.ledalite.com/response	

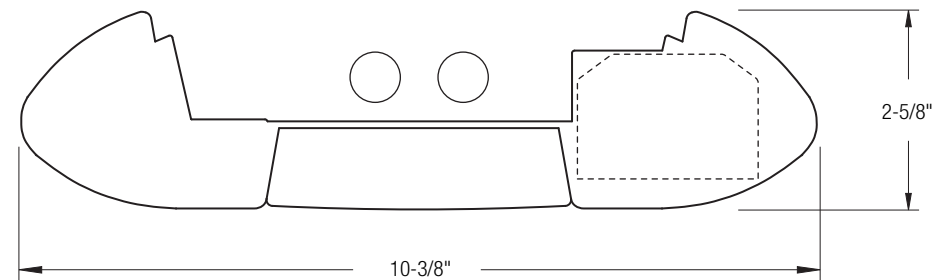

Suspended
Direct/Indirect
2 T5HO



Photometry Optics MJ Semi-Specular VDT Louver w/ 100% Down Kit


Report Summary

Report # 9900261 **Peak Candela Value*** N/A
Filename 8816HO2MJ.ies **Peak to Zenith Ratio*** N/A : 1
Efficiency 41.4% * Between 90-180° vertical angle

Meets RP-1-04 recommendations for VDT-Normal spaces

Candela Distribution

Vertical Angle	Horizontal Angle					Zonal Lumens
	0	22.5	45	67.5	90	
0	1424	1424	1424	1424	1424	
5	1432	1487	1545	1576	1585	154
15	1376	1590	1893	2110	2167	524
25	1194	1581	2086	2269	2277	880
35	1029	1533	1770	1838	1832	1012
45	578	932	1097	1197	1224	789
55	111	185	385	606	727	366
65	22	24	35	112	94	72
75	5	5	6	6	6	9
85	1	1	1	1	1	1
90	0	0	0	0	0	0
95	2	2	2	3	3	3
105	3	3	4	4	5	4
115	3	5	5	6	6	4
125	4	6	7	8	9	7
135	5	10	9	11	11	8
145	6	11	13	14	15	8
155	7	8	17	19	20	8
165	7	8	8	16	19	4
175	7	7	7	7	7	0
180	7	7	7	7	7	

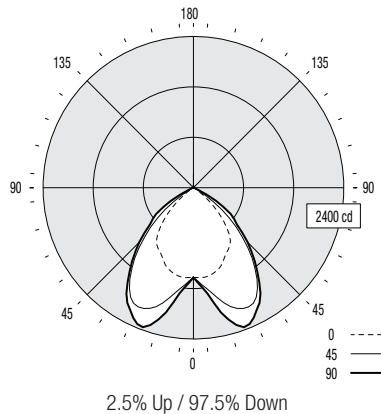

Coefficients of Utilization (%)

Ceiling: Wall:	80				70				50				0				
	70	50	30	10	70	50	30	10	50	30	10	0	70	50	30	10	0
0 RCR	49	49	49	49	47	47	47	45	45	45	40						
1	46	44	43	42	45	43	42	42	41	40	37						
2	43	40	38	36	42	39	37	38	36	35	33						
3	40	36	34	32	39	36	33	34	32	31	29						
4	37	33	30	28	36	32	30	31	29	27	26						
5	34	30	27	25	33	29	27	29	26	24	23						
6	32	27	24	22	31	27	24	26	23	22	20						
7	30	25	22	20	29	25	22	24	21	19	18						
8	28	23	20	18	27	23	20	22	19	17	16						
9	26	21	18	16	25	21	18	20	18	16	15						
10	24	19	16	14	24	19	16	19	16	14	14						

Based on a floor reflectance of 0.2

Avg. Luminance (cd/m²)

Vertical Angle	Horizontal Angle		
	0	45	90
55	1578	5472	10332
65	424	675	1813
75	157	189	189
85	94	94	94

IES files for this and other photometric options can be downloaded online at www.ledalite.com


Additional Information

Modules

Module length excludes endcaps.
Nominal mount spacing for individually mounted modules with fixed position mounts.


Module	Mount Spacing
4ft	4' 0"
8ft	8' 0"
12ft	12' 0"

Endcap




Mounting in Runs

Fixed position mounts supplied standard at ends.
Variable position mounts supplied standard at joints.
Variable position mounts cannot be located on 4ft modules. Optional variable position mounts at ends available upon request (8ft and 12ft modules only).

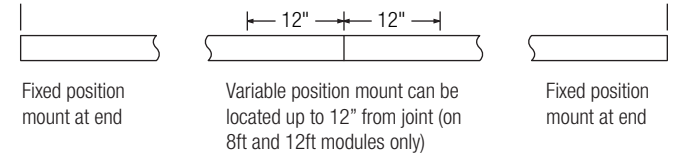

Upper Optics

Downlight kits and lamp separators are not recommended with white louvers (lower optics option W), due to potential for excessive louver brightness or shadowing.

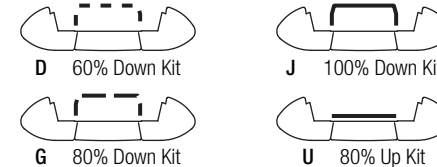

Specifications

Due to continuing product improvements, Ledalite reserves the right to change specifications without notice.

Housing

6063 T5 extruded aluminum.

Weight

2.7 lb/ft.

Optical System

Constructed of 96% reflective white steel to produce a direct/indirect distribution. Louvers are available in white blades and aluminum specular or semi-specular blades. White louver blades are spaced 1.3" apart and are 1.1" deep (34 cells per 4ft section). Standard specular and semi-specular louver blades are spaced 3" apart and are 1" deep (15 cells per 4ft section). Specular VDT and semi-specular VDT louver blades are spaced 1.5" apart and are 1" deep (30 cells per 4ft section). Optional field-installable Variable Optics kits provide additional up or downlight as required.

Endcaps

Aluminum die-cast endcaps, baked powder coat finish for color.

Joints

Self-aligning joining system.

Mounting

Fixed position mounts supplied standard at ends. Variable position mounts supplied standard at joints. Variable position mounts can be located on 8ft or 12ft modules within 12" of joint or end. Aircraft cable gripper is tamper-resistant and provides infinite vertical adjustment capability. Aircraft cable, crimp and cable gripper independently tested to meet stringent safety requirements.

Electrical

Factory pre-wired to section ends with quick-wire connectors.

Ballast

Electronic.

Approvals

Certified to UL and CSA standards.

Finish

High-quality powder coat. Available in Ledalite Standard White (textured matte finish), and a selection of other factory and customer-specified colors. Consult factory for details.