

Achieva®



Project Name


Spec Type

Notes

Suspended

Direct/Indirect

2 T8

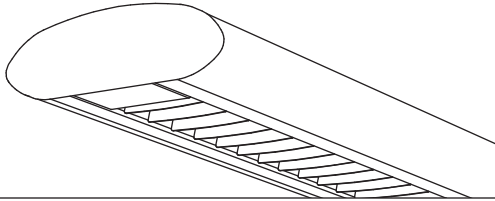

Order Guide

Some combinations of product options may not be available. Consult factory for assistance with your specification.

8816	T02			-		-		-				
Product Series & Type Achieva Direct/Indirect	Lamping 2 T8	Lower Optics W White Louver (34*) P Semi-Specular Louver (15*) S Specular Louver (15*) M Semi-Specular VDT Louver (30*) R Specular VDT Louver (30*)	Upper Optics N None D 60% Down Kit G 80% Down Kit J 100% Down Kit U 80% Up Kit	Run Length <i>Enter the total run length in feet (4ft increments)</i>	Wiring 1 1 cct 2 2 cct 3 1 cct w/ Emergency cct 4 2 cct w/ Emergency cct 5 1 cct w/ Battery Pack 6 2 cct w/ Battery Pack 7 1 cct Dimming	Voltage 1 120V 2 277V 3 347V	Ballast E Standard Ballast Consult website for ballast manufacturer information	Color & Finish W Standard White C Factory Color X Custom Color Consult website for color and finish options	<h3>Mounting Hardware</h3> <div style="display: flex; justify-content: space-between;"> <input type="text"/> <input type="text"/> </div> <table border="1"> <tr> <td>Mount Type Consult separate mounting spec sheet for mount type options</td> <td>Suspension Length <i>Enter distance from ceiling to top of fixture in inches</i></td> </tr> </table>		Mount Type Consult separate mounting spec sheet for mount type options	Suspension Length <i>Enter distance from ceiling to top of fixture in inches</i>
Mount Type Consult separate mounting spec sheet for mount type options	Suspension Length <i>Enter distance from ceiling to top of fixture in inches</i>											
		* Number of louver cells per 4ft section See details on reverse	See details on reverse	See details on reverse	Consult website for complete list of standard wiring options							

Upgrades & Accessories

Please indicate with check mark.

Lamps Included

Lamps Included and Installed


Lamp Guard
Not available with upper optics option U



Dust Cover



Response Daylight (Integrated Controls)
For details visit www.ledalite.com/response

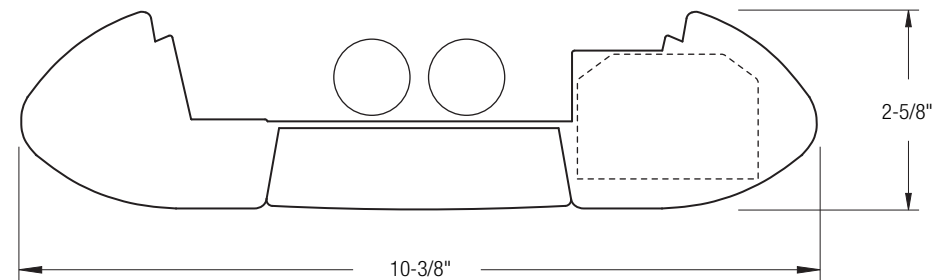



Photometry Optics MJ Semi-Specular VDT Louver w/ 100% Down Kit


Report Summary

Report # 9900384 **Peak Candela Value*** N/A
Filename 8816T02MJ.ies **Peak to Zenith Ratio*** N/A : 1
Efficiency 44.6% * Between 90-180° vertical angle

Meets RP-1-04 recommendations for VDT-Normal spaces

Candela Distribution

Vertical Angle	Horizontal Angle					Zonal Lumens
	0	22.5	45	67.5	90	
0	1116	1116	1116	1116	1116	
5	1117	1167	1236	1272	1284	122
15	1055	1241	1401	1438	1422	373
25	915	1211	1271	1355	1370	572
35	784	1028	1097	1165	1201	663
45	448	646	740	850	891	553
55	73	124	276	431	485	258
65	14	16	21	93	120	55
75	3	3	4	4	3	6
85	1	0	0	0	0	0
90	0	0	0	0	0	0
95	2	1	2	2	2	2
105	3	3	3	3	3	4
115	3	4	5	5	5	4
125	3	5	6	7	7	4
135	4	8	7	8	9	4
145	5	9	10	10	11	4
155	6	7	12	14	15	4
165	6	6	6	11	13	3
175	6	6	6	5	5	0
180	6	6	6	6	6	

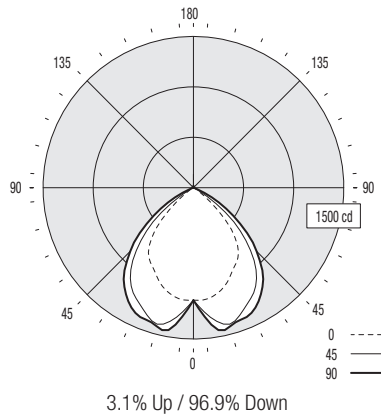

Coefficients of Utilization (%)

Ceiling: Walk:	80				70				50				0				
	70	50	30	10	70	50	30	10	50	30	10	0	70	50	30	10	0
0 RCR	53	53	53	53	51	51	51	49	49	49	44	49	49	49	49	44	
1	49	48	47	45	48	47	46	45	44	43	39	48	47	46	45	44	39
2	46	43	41	39	45	43	40	41	39	38	35	46	43	40	41	39	35
3	43	39	36	34	42	39	36	37	35	33	31	43	39	36	37	35	31
4	40	36	32	30	39	35	32	34	31	29	28	40	36	32	34	31	28
5	37	32	29	27	36	32	29	31	28	26	25	37	32	29	31	28	25
6	34	29	26	24	34	29	26	28	25	23	22	34	29	26	28	25	22
7	32	27	24	21	31	27	23	26	23	21	20	32	27	24	26	23	20
8	30	25	21	19	29	24	21	24	21	19	18	30	25	21	24	21	18
9	28	23	20	17	28	23	19	22	19	17	16	28	23	20	22	19	16
10	26	21	18	16	26	21	18	20	18	17	15	26	21	18	20	18	15

Based on a floor reflectance of 0.2

Avg. Luminance (cd/m²)

Vertical Angle	Horizontal Angle		
	0	45	90
55	1037	3922	6893
65	270	405	2315
75	94	126	94
85	94	0	0

IES files for this and other photometric options can be downloaded online at www.ledalite.com


Additional Information

Modules

Module length excludes endcaps. Nominal mount spacing for individually mounted modules with fixed position mounts.


Module	Mount Spacing
4ft	4' 0"
8ft	8' 0"
12ft	12' 0"

Endcap




Mounting in Runs

Fixed position mounts supplied standard at ends. Variable position mounts supplied standard at joints. Variable position mounts cannot be located on 4ft modules. Optional variable position mounts at ends available upon request (8ft and 12ft modules only).

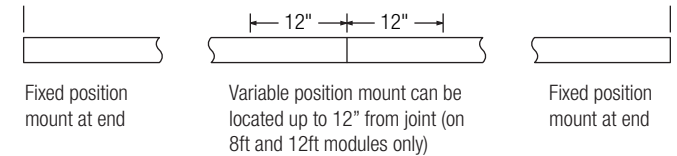

Upper Optics

Downlight kits and lamp separators are not recommended with white louvers (lower optics option W), due to potential for excessive louver brightness or shadowing.

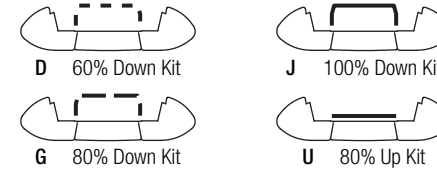

Specifications

Due to continuing product improvements, Ledalite reserves the right to change specifications without notice.

Housing

6063 T5 extruded aluminum.

Weight

2.7 lb/ft.

Optical System

Constructed of 96% reflective white steel to produce a direct/indirect distribution. Louvers are available in white blades and aluminum specular or semi-specular blades. White louver blades are spaced 1.3" apart and are 1.1" deep (34 cells per 4ft section). Standard specular and semi-specular louver blades are spaced 3" apart and are 1" deep (15 cells per 4ft section). Specular VDT and semi-specular VDT louver blades are spaced 1.5" apart and are 1" deep (30 cells per 4ft section). Optional field-installable Variable Optics kits provide additional up or downlight as required.

Endcaps

Aluminum die-cast endcaps, baked powder coat finish for color.

Joints

Self-aligning joining system.

Mounting

Fixed position mounts supplied standard at ends. Variable position mounts supplied standard at joints. Variable position mounts can be located on 8ft or 12ft modules within 12" of joint or end. Aircraft cable gripper is tamper-resistant and provides infinite vertical adjustment capability. Aircraft cable, crimp and cable gripper independently tested to meet stringent safety requirements.

Electrical

Factory pre-wired to section ends with quick-wire connectors.

Ballast

Electronic.

Approvals

Certified to UL and CSA standards.

Finish

High-quality powder coat. Available in Ledalite Standard White (textured matte finish), and a selection of other factory and customer-specified colors. Consult factory for details.