



Linear

BoldPlay Suspended LED

Tunable White
2700-6500K, 3400 lm/4ft



Project: _____
 Spec Type: _____
 Catalog No: 7806L2EQN
 Qty _____
 Line Notes: _____

Brilliant design and intuitive engineering fearlessly combine to deliver unprecedented performance. BoldPlay's striking contrast of effortless style and urban edginess makes a distinct statement in any space. Available tunable white technology gives you the ability to vary color temperature and intensity, harmonizing lighting with your daily life.

Ordering guide

Product Type	Source	Color Temp *	Lumens *	Lower Optics	Upper Optics	Run Length	Wiring †	Voltage	Driver	Finish
<input type="text" value="7806"/>	<input type="text" value="L"/>	<input type="text" value="2"/>	<input type="text" value="E"/>	<input type="text" value="Q"/>	<input type="text" value="N"/>	<input type="text"/>	<input type="text"/>	<input type="text"/>	<input type="text"/>	<input type="text"/>
BoldPlay Direct/ Indirect	L LED	2 2channel 2700-6500K	C 4800 lm/4ft E 3400 lm/4ft	Q MesoOptics Lens	N None G 80% Down Kit J 100% Down Kit	04 4' 08 8' XX Total run length (4' increments)	7 1 cct w/ Dimming N 1 cct w/ Dim & BP	1 120V 2 277V	E Philips Advance	W Standard White T Titanium Silver B Black C Custom

* Nominal values within a range. Consult ies file for exact color temp, lumens and distribution † Not all wiring types are available with all configurations. Consult factory for complete list of available options

Mounting Hardware

Mount Type
Consult separate mounting spec sheet for mount type options

Suspension Length
Distance from ceiling to top of luminaire in inches

Endcaps -

Integrated Controls Please indicate with check mark.

No Options Available

Sculpted

Solid flat



BoldPlay

Tunable White

2700-6500K, 3400 lm/4ft

Optical System

The optical system is comprised of arrays of LEDs, edge-lighting a low profile Light Guide panel. The Light Guide panel allows light to be coupled and transmitted through total internal reflection. The microstructured surface of the panel optimizes the light extraction to create a direct/indirect distribution. Light is purified and controlled by MesoOptics film as it passes through the nonglare acrylic lens. Standard distribution is 70% up/30% down.

Endcaps

Diecast aluminum endcaps finished with a textured matte powder coat to match the luminaire. Suspended: Available in sculpted (standard) & solid flat.

Finish

High quality powder coated, available in matte white, black or titanium silver. Other custom colors available on request.

Electrical

Factory pre-wired to section ends with quick-wire connectors.

Lumen Maintenance

Lumen maintenance of the LEDs has been tested by the manufacturer in accordance with IESNA LM-80-08. At an ambient temperature of 25°C, the LED lumen maintenance expectation is L80(12K)>72,000h according to IES TM-21-11 Addendum A Reported methodology.

Housing

Precision formed 18 gauge cold-rolled steel.

Weight

Maximum: Suspended 3.75lb/ft

Mounting

Tamper-resistant aircraft cable gripper provides infinite vertical adjustment capability. Aircraft cable, crimp and cable gripper are independently tested to meet stringent safety requirements.

Joints

Self-aligning joining system with hands-free pre-joining wire access.

Approvals

Certified to UL, CSA and IES standards.

Warranty

Philips indoor professional luminaires 5 year LED warranty: <http://www.philips.com/warranties>.

Environment

Rated for dry or damp locations in operating ambient temperatures 0-40°C (32-104°F). Certain luminaire components may be adversely affected by contaminants. Damage caused by sulfur, chlorine, petroleum based solutions or other contaminants are not covered under warranty.

Dimming

Color accuracy held to 5% at 2700K and 6500K and 10% at 4000K.


Controls

Luminaires are not sold individually and are only compatible with load controllers, sensors, user interfaces and front end software from Philips. Philips controls platform allows for more flexibility with customized lighting scenes and behaviors as well as scalability of the tunable white solution into a more extensive lighting network management system. To learn more about the Philips controls solution please visit our tunable white page or <http://www.lightingproducts.philips.com/our-brands/philips-controls/dynalite.html>

Due to continuing product improvements, Philips Ledalite reserves the right to change the specifications without notice.

Options and Details

Cross Section

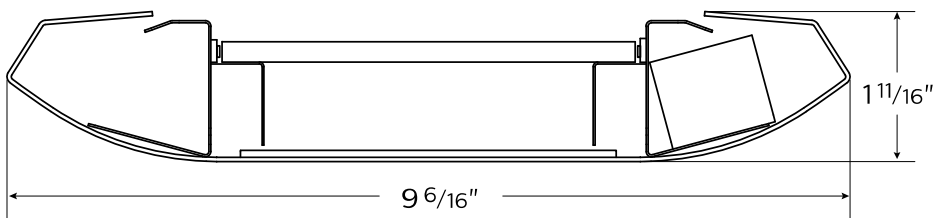



BoldPlay Suspended LED

Tunable White

2700-6500K, 3400 lm/4ft


Modules

Module length excludes end caps. Nominal mounting spacing for individually mounted modules.

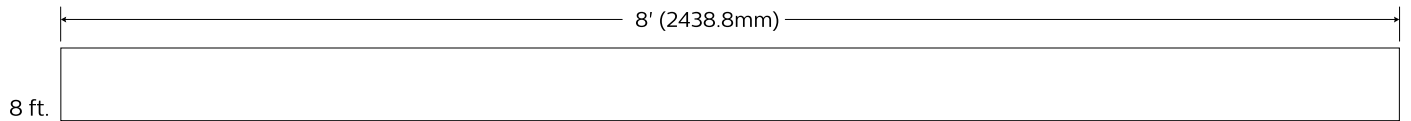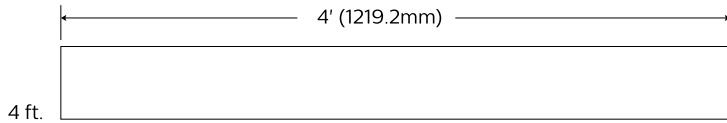



Note: Refer to installation instructions for exact mount.

Lens view

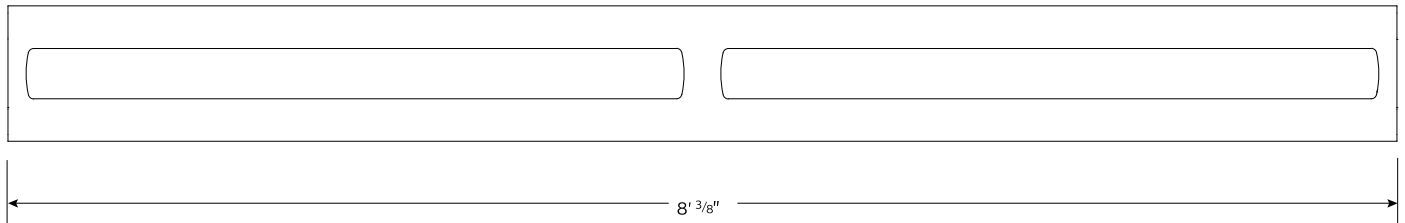


Suspended
(without endcaps)

End caps




Flat




Sculpted

Upper optics



G 80% Down Kit




J 100% Down Kit

BoldPlay Suspended LED

Tunable White

2700-6500K, 3400 lm/4ft

Photometry - 2700K

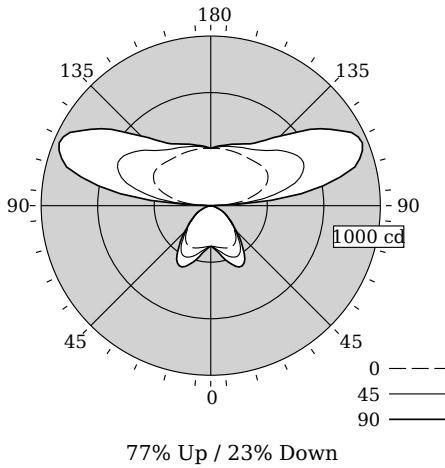

Candela Distribution

Vertical Angle	Horizontal Angle					Zonal Lumens
	0	22.5	45	67.5	90	
0	239	239	239	239	239	0
5	242	243	250	252	256	24
15	257	266	294	311	329	83
25	271	291	335	383	399	154
35	256	278	306	356	345	191
45	193	210	204	230	215	164
55	127	133	125	137	131	118
65	73	75	72	76	74	73
75	28	25	23	23	23	26
85	4	0	0	0	0	2
90	0	1	0	2	0	0
95	124	129	214	258	357	221
105	289	322	514	728	880	554
115	372	427	603	839	959	621
125	385	435	552	723	791	514
135	367	406	460	553	581	369
145	353	380	407	444	450	258
155	347	366	381	397	401	176
165	343	354	362	370	371	103
175	339	343	345	348	349	33
180	338	338	338	338	338	0

Values per 4ft unit

Fixture photometry has been conducted in accordance with IESNA LM-79-08

IES files for this and other photometric options can be downloaded online at www.lightingproducts.philips.com

Coefficients of Utilization (%)

RCR	Ceiling												
	70	50	30	10	70	50	30	10	70	50	30	10	0
0	101	101	101	101	89	89	89	68	68	68	23	23	23
1	92	88	84	81	82	78	75	60	58	56	20	20	20
2	84	77	71	67	74	69	64	53	50	47	17	17	17
3	77	68	61	56	68	60	55	47	43	40	15	15	15
4	70	60	53	47	62	54	47	41	37	34	13	13	13
5	64	53	46	40	57	48	41	37	32	29	11	11	11
6	59	48	40	34	52	43	36	33	29	25	10	10	10
7	54	43	35	30	48	38	32	30	25	22	9	9	9
8	50	39	31	26	45	35	28	27	23	19	8	8	8
9	47	35	28	23	41	32	25	25	20	17	7	7	7
10	43	32	25	21	39	29	23	23	18	15	6	6	6

Avg. Luminance (cd/m2)

Vertical Angle	Horizontal Angle		
	0	45	90
55	2165	2119	2227
65	1684	1657	1698
75	1064	853	875
85	392	0	0

Distribution Specifications


Hemisphere	77% Up / 23% Down
Peak/Zenith	2.86
Peak Output	968 cd
Glare Control	Meets RP-1-12 recommendations for VDT-Critical spaces

BoldPlay Suspended LED

Tunable White

2700-6500K, 3400 lm/4ft

Nominal CCT:	2700K	3000K	3500K	4000K	5000K	6500K
Flux (lm)	3686	3750	3756	3843	3748	3738
Efficacy (lm/W)	99.4	93.8	97.6	99.3	98.6	103.5
Power (W)	37.1	40.0	38.5	38.7	38.0	36.1
CCT (K)	2660	2863	3313	3798	4665	6148
CRI	82	84	86	87	87	84
R9	7	13	22	27	27	12
x	0.4615	0.4425	0.4104	0.3855	0.3541	0.3190
y	0.4084	0.3985	0.3817	0.3686	0.3520	0.3333
Duv	-0.0009	-0.0029	-0.0050	-0.0053	-0.0033	0.0023

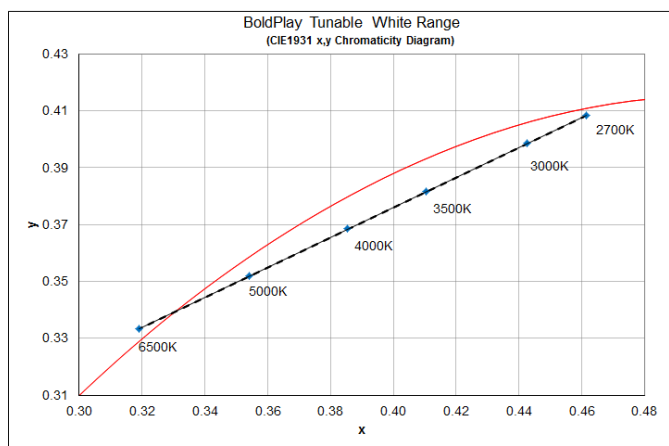

Commissioned State - 2700K

Input Voltage	120V	277V
Input Power	37.1W	36.8W
Input Current	0.31A	0.14A
Power Factor	0.994	0.947
Total Harm. Distortion	9.4%	15.4%
Tested values – contact technical support for rated values.		

Non Commissioned State

Input Voltage	120V	277V
Input Power	72.7	72.8
Input Current	0.61	0.26

© 2018 Philips Lighting Holding B.V. All rights reserved. Philips reserves the right to make changes in specifications and/or to discontinue any product at any time without notice or obligation and will not be liable for any consequences resulting from the use of this publication.
www.philips.com/luminaires



Philips Lighting, North America Corporation
200 Franklin Square Drive, Somerset, NJ 08873
Tel. 855-486-2216

Philips Lighting Canada Ltd.,
281 Hillmount Rd, Markham, ON, Canada L6C 2S3
Tel. 800-668-9008