



# Linear

## FloatPlane Wall

2200 lm/4ft  
3000/3500/4000K



Project: \_\_\_\_\_  
Spec Type: \_\_\_\_\_  
Catalog No: 24x8LxGAA \_\_\_\_\_  
Qty \_\_\_\_\_  
Line Notes: \_\_\_\_\_

With FloatPlane LED, it's easier than ever to integrate sleek and sporty style into your layout and within budget. Fresh and playful, with Curve and Edge profile options, FloatPlane's performance rivals that of high-end LED luminaires with the affordability of fluorescent. Available tunable white technology gives you the ability to vary color temperature and intensity, harmonizing lighting with your daily life.

### Ordering guide


Product Type	Version	Source	Color Temp *	Lumens *	Lower Optics	Upper Optics	Run Length	Wiring †	Voltage	Driver	Finish
24		L		G	A	A					
24 FloatPlane	G8 Edge Wall R8 Curve Wall	L LED	A 4000K B 3500K C 3000K	C 4200 lm/4ft E 3100 lm/4ft G 2200 lm/4ft	A Acrylic diffuser	A Acrylic diffuser G 75% Down Kit J 100% Down Kit	04 4' 06 6' 08 8' Total run length (2' increments)	7 1 cct Dimming E 2 cct A/B Dimming M 1 cct Dimming + EM Wiring N 1 cct Dimming + EM Batt. Pack	1 120V 2 277V 3 347V	E Philips Advance 0-10V (1% dim)	W Standard White T Titanium Silver B Black C Custom

\* Nominal values within a range. Down kits and dust covers reduce output & efficacy. Consult photometry data for color temp, lumens & distribution of chosen configuration.  
† Not all wiring types are available with all configurations. Consult Philips Ledalite for a complete list of available options.

### Mounting Hardware

**Mount Type**  
Consult separate mounting spec sheet for mount type options

### Endcaps -

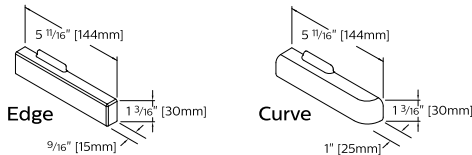

# FloatPlane Wall

2200 lm/4ft

3000/3500/4000K

## Optical System

White light emitted from dual linear arrays of lateral-facing LEDs is diffused and redirected into the upper and lower hemispheres with a combination of high reflectivity elements and acrylic diffusers. This delivers a highly efficient 70% up / 30% down indirect/direct distribution with a wide, homogeneous batwing distribution in the upper hemisphere. Twin polymer diffusers on the lower surface combine for an optical aperture of 5-1/2" to deliver a uniform, controlled brightness, maximizing visual comfort and luminaire efficacy. Factory or field installable variable optics kits are available to modify the distribution to 75% down or close to 100% down light. Field installable dust covers available on suspended versions.

## Endcaps

Diecast aluminum endcaps in either Edge or Curve versions to match housing.

## Finish

High quality powder coated, available in matte white, black or titanium silver. Other custom colors, including Pacific Aqua and Surf Yellow, available on request. White sensors only.

## Housing

Precision formed 18 gauge cold-rolled steel. Approx. cross section size: 1.5"h x 8"w (suspended) or 5.7"w (wall mount).

## Weight

Maximum: Suspended 3.5lb/ft, Wall 3.3lb/ft

## Electrical

Factory pre-wired to section ends with quick-wire connectors.

## Standard Drivers

Philips Advance Xitanium 0-10V, 1-100%.  
Philips Advance Xitanium SR, 5-100% (for SpaceWise DT).

Class 2 rated output. Consult Philips Ledalite for other available drivers.

## Standard Battery Pack

Philips Bodine, 90 min, 10W. Class 2 rated output, Emergency lumen output = 10W x luminaire efficacy x 1.1. Typical output 1400lm.

## Lumen Maintenance

LEDs have been tested by the manufacturer in accordance with IESNA LM-80-08. At an ambient temperature of 25°C, the LED lumen maintenance expectation according to IES TM-21-11 is:

L80 (12k) 70,000 hrs suspended / 64,000 hrs wall.  
(Reported methodology)

L70 (12k) 108,000 hrs suspended / 98,000 hrs wall.  
(Projected methodology)

## Source Color

LEDs rated for color rendering CRI >80, R9 >0 and fixture to fixture color accuracy within 2 SDCM.

## Controls

Suspended version available with the following integrated controls:

Response daylight sensor (for single zone).

SpaceWise DT occupancy & daylight sensor w/ advanced grouping & dwell time.

SpaceWise DT commissioning via Android phone and Philips Field App. Compatible dimming wireless wall switches are available. For more information, please refer to [www.philips.com/spacewise](http://www.philips.com/spacewise)

## Mounting

**Suspended:** Rapid installation sling mount at joints and ends. High strength aircraft cable and stainless steel gripper provide unlimited vertical adjustment and are independently tested to stringent safety standards.

**Wall:** A hidden steel rail and bracket system attaches to the existing structure and supports housings close to the wall. Mount positioning is fully variable along the modules to accommodate site conditions, spaced up to 4 1/2" on center and within 12" of an end or joint.

## Joints

Self-aligning, gasketed joining system. Access panels in the driver channel allow quick and hassle-free wiring of modules either before or after mechanical joints are completed.

## Approvals

Certified to UL, CSA and IES standards. Certain suspended versions (24x5L) are DesignLights Consortium® qualified. Please see the DLC QPL list for exact catalog numbers ([www.designlights.org/QPL](http://www.designlights.org/QPL)).

## Warranty


Philips indoor professional luminaires 5 year LED warranty: <http://www.philips.com/warranties>

## Environment

Rated for dry or damp locations in operating ambient temperatures 0-40°C (32-104°F). Certain luminaire components may be adversely affected by contaminants. Damage caused by sulfur, chlorine, petroleum based solutions or other contaminants in the area of operation are not covered under warranty. Not suitable for natatorium environments.

Due to continuing product improvements, Philips Ledalite reserves the right to change the specifications without notice.

## Dimensions - Cross Section

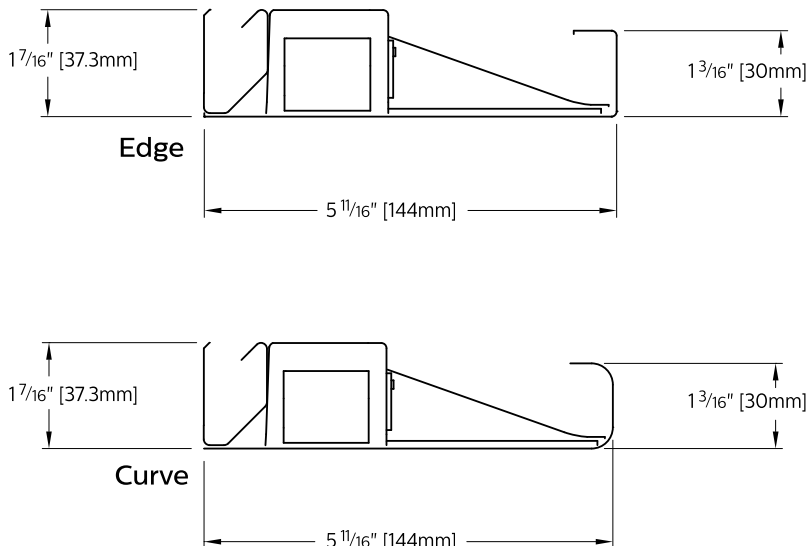


# FloatPlane Wall


2200 lm/4ft

3000/3500/4000K

## Dimensions - Modules

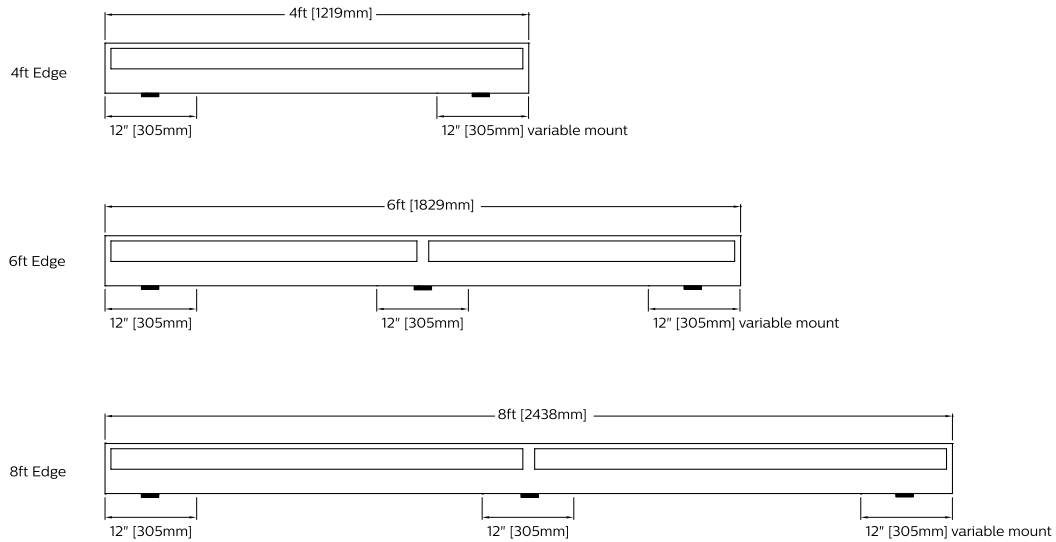

## Optics and Styles

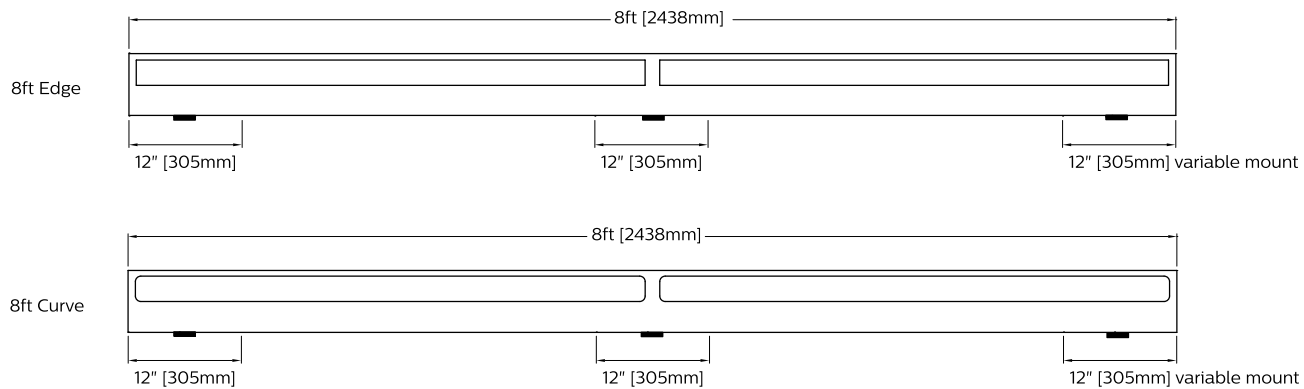


# FloatPlane Wall

2200 lm/4ft

3000/3500/4000K

## Photometry - 3500K

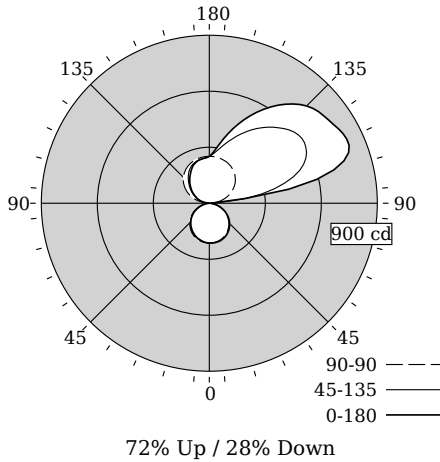

## Candela Distribution

Vertical Angle	Horizontal Angle					Zonal Lumens
	0	45	90	135	180	
0	213	213	213	213	213	0
5	213	213	212	211	211	20
15	210	209	206	203	201	58
25	199	198	194	189	187	89
35	180	179	174	168	165	108
45	153	153	148	143	140	114
55	121	120	116	112	109	104
65	85	84	81	78	75	79
75	46	46	43	40	38	45
85	12	12	10	9	8	12
90	8	5	0	0	0	0
95	23	83	22	5	0	54
105	691	419	77	50	47	234
115	813	571	125	84	79	303
125	779	605	164	119	113	300
135	737	566	196	156	147	264
145	641	494	221	194	180	207
155	517	411	237	223	214	143
165	385	330	246	237	236	80
175	278	268	251	244	243	25
180	251	251	251	251	251	0

Photometry based on 4ft white luminaire. Dust covers and non-white finishes reduce delivered lumens. Custom color finishes may shift output color temperature.

Fixture photometry has been conducted in accordance with IESNA LM-79-08

IES files for this and other photometric options can be downloaded online at [www.lightingproducts.philips.com](http://www.lightingproducts.philips.com)

## Coefficients of Utilization (%)

RCR	Ceiling/Wall												
	70	50	30	10	70	50	30	10	70	50	30	10	0
0	102	102	102	102	91	91	91	71	71	71	28	28	28
1	93	89	85	81	83	79	76	62	60	58	23	23	23
2	84	77	71	66	75	69	64	54	51	48	19	19	19
3	77	68	60	55	68	61	55	48	43	40	16	16	16
4	70	60	52	46	62	54	47	42	37	34	14	14	14
5	64	53	45	39	57	48	41	38	33	29	12	12	12
6	59	47	39	34	52	43	36	34	29	25	10	10	10
7	54	42	35	29	48	38	32	30	25	22	9	9	9
8	50	38	31	26	45	35	28	28	23	19	8	8	8
9	47	35	28	23	42	32	25	25	20	17	7	7	7
10	44	32	25	20	39	29	23	23	18	15	7	7	7

## Avg. Luminance (cd/m<sup>2</sup>)

Vertical Angle	Horizontal Angle		
	0	90	180
55	3124	2993	2809
65	2958	2815	2601
75	2618	2444	2153
85	2073	1728	1382

## Distribution

Hemisphere	72% Up / 28% Down
Peak/Zenith	3.24
Peak Output	813 cd
Glare Control	Meets RP-1-12 recommendations for VDT-Critical spaces

Philips Ledalite

lighting facts<sup>®</sup>

A Program of the U.S. DOE

---

**Light Output (Lumens)** 2240

**Watts** 18.1

**Lumens per Watt (Efficacy)** 123.76

---

**Color Accuracy** 82

Color Rendering Index (CRI)

---

**Light Color** 3427 (Bright White)

Correlated Color Temperature (CCT)

2700K    3000K    4500K    6500K

---

All results are according to IESNA LM-79-2008: *Approved Method for the Electrical and Photometric Testing of Solid-State Lighting*. The U.S. Department of Energy (DOE) verifies product test data and results.

Visit [www.lightingfacts.com](http://www.lightingfacts.com) for the **Label Reference Guide**.

Registration Number: F46Z-OQQ44 (7/9/2015)  
 Model Number: 24x8LBGAA  
 Type: Luminaire - Linear

# FloatPlane Wall

2200 lm/4ft

3000/3500/4000K

## Optical Performance

Nominal CCT:	3000K	3500K	4000K
Flux (lm)	2194	2240	2262
Efficacy (lm/W)	122.6	123.8	125.0
Power (W)	17.9	18.1	18.1
CCT (K)	3095	3427	4054
CRI	81	82	83
R9	3	6	12
x	0.4331	0.4123	0.3791
y	0.4077	0.4001	0.3791
Duv	0.0020	0.0030	0.0010

## Electrical Performance - 3500K

Input Voltage	120V	277V	347V
Input Power	18.1W	18.2W	17.2W
Input Current	0.15A	0.07A	0.05A
Power Factor	0.994	0.970	0.959
Total Harm. Distortion	7.2%	8.8%	13.0%

Tested values . contact technical support for rated values. Off-state power zero unless certain controls are specified.

