

# Are you ready to jump?

## JUMP SURFACE LED



DIRECT, RIBBED MESOOPTICS LENS - SPLASHPERF  
CRI >80 4000K, 3600 lm/4ft

**Project:** \_\_\_\_\_

**Spec Type:** \_\_\_\_\_

**Catalog No:** 1211LAEQS \_\_\_\_\_

**Qty** \_\_\_\_\_

**Line Notes:** \_\_\_\_\_



### Ordering guide


| Product Type                      | Source                         | Color Temp *                   | Lumens *                       | Lower Optics                   | Upper Optics                             | Run Length   | Wiring †  | Voltage                    | Driver               | Finish   |
|-----------------------------------|--------------------------------|--------------------------------|--------------------------------|--------------------------------|--|--|---|----------------------------|----------------------|--|
| <input type="text" value="1211"/> | <input type="text" value="L"/> | <input type="text" value="A"/> | <input type="text" value="E"/> | <input type="text" value="Q"/> | <input type="text" value="S"/>           | <input type="text"/>                                     | <input type="text"/>  | <input type="text"/>       | <input type="text"/> | <input type="text"/>   |
| Jump Symmetric                    | L LED                          | A 4000K<br>B 3500K<br>C 3000K  | G 2400 lm/4ft<br>E 3600 lm/4ft | Q MesoOptics Lens              | E No Perf<br>P PixelPerf<br>S SplashPerf | 04 4'<br>08 8'<br>XX Total run length<br>(4' increments) | 1 1 cct<br>3 1 cct w/ EM cct<br>5 1 cct w/ BP<br>7 1 cct w/ Dimming<br>8 1 cct w/ TW<br>B 2 cct A/B | 1 120V<br>2 277V<br>3 347V | E Standard           | W Standard White<br>T Titanium Silver<br>B Black<br>X Custom |

\* Nominal values within a range. Consult ies file for exact color temp and lumens † Consult website for complete list of standard wiring options

### Mounting Hardware

Mount Type  
Consult separate mounting spec sheet for mount type options

Endcaps -

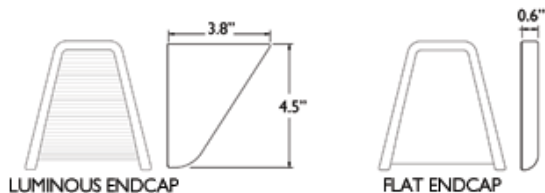

### Integrated Controls


Please indicate with check mark.

Response Daylight Single Zone (DS)



## DIRECT, RIBBED MESOOPTICS LENS - SPLASHPERF

### Photometry

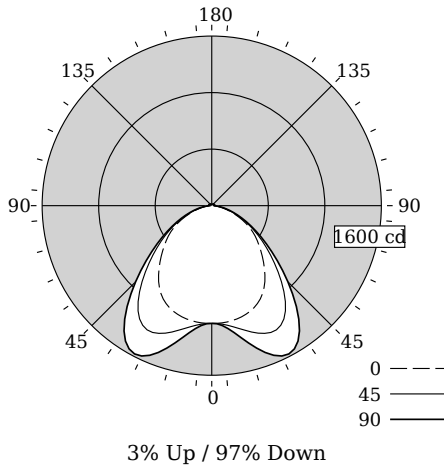

**LED lighting facts**  
A Program of the U.S. DOE

**Light Output (Lumens)** 3641  
**Watts** 45.5  
**Lumens per Watt (Efficacy)** 80

**Color Accuracy** 82  
Color Rendering Index (CRI)

**Light Color**  
Correlated Color Temperature (CCT) 4037 (Bright White)

Warm White 2700K 3000K Bright White 4500K Daylight 6500K

**Warranty\*\*** Yes

All results, except LED Lumen Maintenance, are according to IESNA LM-79-2008. Approved Method for the Electrical and Photometric Testing of Solid-State Lighting. The U.S. Department of Energy (DOE) verifies product test data and results.

\*\* See [www.lightingfacts.com/products](http://www.lightingfacts.com/products) for details.

Registration Number: F46Z-GFKRJJ (5/12/2013)  
Model Number: 12x1LAEQx  
Type: Other

|                                     |                         |
|-------------------------------------|-------------------------|
| <b>Total Output</b>                 | <b>3641 lm</b>          |
| <b>Efficacy</b>                     | <b>80.0 lm/W</b>        |
| <b>CCT</b>                          | <b>4037K</b>            |
| <b>CRI</b>                          | <b>82</b>               |
| <b>R9</b>                           | <b>18</b>               |
| <b>Distribution</b>                 | <b>3% Up / 97% Down</b> |
| <b>Spacing Criteria (0/90/180°)</b> | <b>1.27/1.68/NA</b>     |

Values per 4ft unit

Fixture photometry has been conducted by an NVLAP accredited testing laboratory in accordance with IESNA LM-79:2008

Lumen maintenance of the LEDs has been tested by the manufacturer in accordance with IESNA LM-80:2008

IES files for this and other photometric options can be downloaded online at [www.lightingproducts.philips.com](http://www.lightingproducts.philips.com)

### Candela Distribution

| Vertical Angle | Horizontal Angle |      |      |      | Zonal Lumens |
|----------------|------------------|------|------|------|--------------|
|                | 0                | 22.5 | 45   | 90   |              |
| 0              | 1111             | 1111 | 1111 | 1111 | 0            |
| 5              | 1110             | 1105 | 1122 | 1135 | 108          |
| 15             | 1086             | 1116 | 1217 | 1312 | 346          |
| 25             | 1019             | 1106 | 1320 | 1501 | 599          |
| 35             | 874              | 981  | 1212 | 1389 | 735          |
| 45             | 674              | 742  | 886  | 987  | 669          |
| 55             | 500              | 526  | 582  | 621  | 515          |
| 65             | 318              | 326  | 344  | 357  | 340          |
| 75             | 147              | 153  | 165  | 175  | 176          |
| 85             | 34               | 42   | 52   | 54   | 56           |
| 90             | 0                | 10   | 18   | 25   | 28           |
| 95             | 0                | 9    | 18   | 26   | 18           |
| 105            | 1                | 9    | 19   | 26   | 18           |
| 115            | 1                | 10   | 19   | 25   | 17           |
| 125            | 3                | 10   | 18   | 24   | 15           |
| 135            | 4                | 10   | 17   | 22   | 12           |
| 145            | 5                | 9    | 15   | 19   | 9            |
| 155            | 8                | 9    | 13   | 16   | 6            |
| 165            | 8                | 9    | 10   | 11   | 3            |
| 175            | 9                | 9    | 9    | 9    | 1            |
| 180            | 9                | 9    | 9    | 9    | 0            |

### Coefficients of Utilization (%)

| RCR | Ceiling: |     | 80  |     |     |     | 70  |     |     |     |     |
|-----|----------|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|
|     | Wall:    | 70  | 50  | 30  | 10  | 70  | 50  | 30  | 50  | 50  | 10  |
| 0   | 118      | 118 | 118 | 118 | 115 | 115 | 115 | 110 | 110 | 110 | 110 |
| 1   | 109      | 104 | 100 | 97  | 106 | 102 | 98  | 97  | 94  | 92  | 92  |
| 2   | 100      | 92  | 85  | 80  | 97  | 90  | 84  | 86  | 81  | 77  | 77  |
| 3   | 91       | 81  | 73  | 67  | 89  | 79  | 72  | 76  | 70  | 65  | 65  |
| 4   | 84       | 72  | 64  | 58  | 81  | 71  | 63  | 68  | 61  | 56  | 56  |
| 5   | 77       | 65  | 56  | 50  | 75  | 64  | 55  | 61  | 54  | 49  | 49  |
| 6   | 71       | 58  | 50  | 44  | 69  | 57  | 49  | 55  | 48  | 43  | 43  |
| 7   | 66       | 53  | 45  | 39  | 64  | 52  | 44  | 50  | 43  | 38  | 38  |
| 8   | 62       | 48  | 40  | 34  | 60  | 48  | 40  | 46  | 39  | 34  | 34  |
| 9   | 57       | 44  | 36  | 31  | 56  | 44  | 36  | 42  | 35  | 30  | 30  |
| 10  | 54       | 41  | 33  | 28  | 52  | 40  | 33  | 39  | 32  | 28  | 28  |

### Avg. Luminance (cd/m2)




| Vertical Angle | Horizontal Angle |      |      |
|----------------|------------------|------|------|
|                | 0                | 45   | 90   |
| 55             | 6965             | 5572 | 5442 |
| 65             | 5857             | 3804 | 3516 |
| 75             | 4183             | 2240 | 2023 |
| 85             | 2277             | 951  | 775  |

### Electrical Specifications


|  |              |
|--|--------------|
| <b>Input Voltage</b>   | <b>120V</b>  |
| <b>Input Power</b>   | <b>45.5W</b> |
| <b>Input Current</b>   | <b>0.4A</b>  |
| <b>Power Factor</b>  | <b>0.991</b> |
| <b>Tested values – contact technical support for rated values. Off-state power zero unless certain controls are specified.</b> |              |

## DIRECT, RIBBED MESOOPTICS LENS - SPLASHPERF

### Options and Details

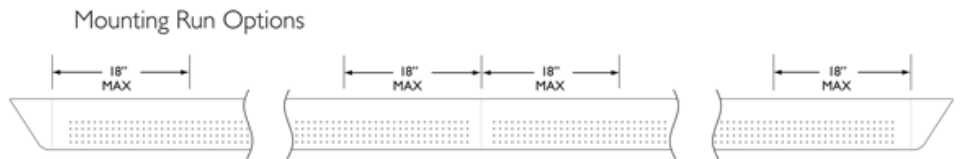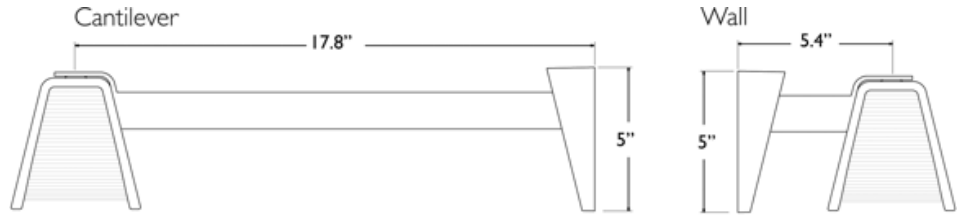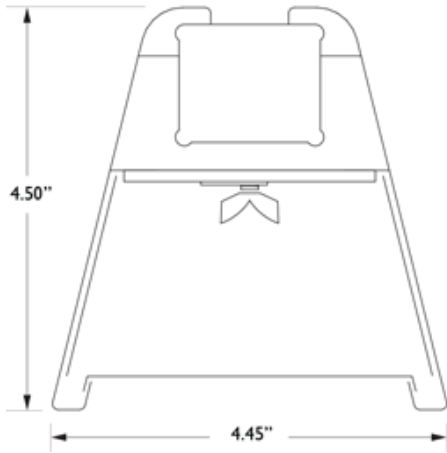

### Optics & Styles

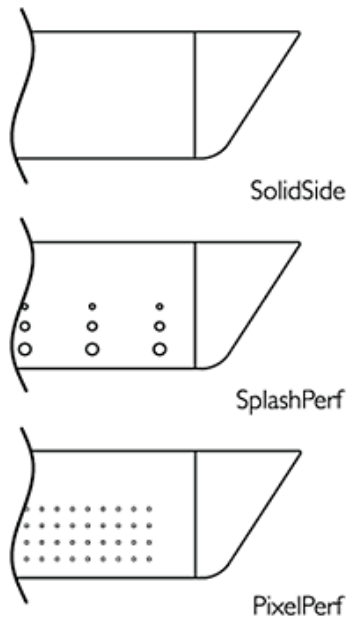

#### Housing

20 gauge cold-rolled steel precision formed and welded with optional perforated patterns.

#### Weight

Maximum 3.5lb/ft.

#### Optical System

White light emitted from the LED sources passes through a biconvex lens where it is internally reflected and laterally refocused. Light is then redirected by Miro Silver reflectors and exits through the optical lens assembly. The optical lens assembly consists of an acrylic extrusion with a ribbed profile holding a layer of MesoOptics film. MesoOptics homogenizes the light and color to ensure consistency while controlling high angle glare and creating an optical batwing distribution.

#### Standard Driver

Dimming: 0-10V, 5-100%. Output is Class 2 rated.

#### Lumen Maintenance

At an ambient temperature of 25°C, the LED lumen maintenance expectation is  $L_{80}$  (12k) >60,000 hrs.

#### Mounting

Variable position mounts are supplied for each joint and end. The mounts can be installed up to 18" from joints and end locations. Tamper-resistant aircraft cable grippers provide infinite vertical adjustment capability. Aircraft cable, crimp and cable gripper are independently tested to meet stringent safety requirements.

#### Joints

Self-aligning joining system with hands-free pre-joining wire access.

#### Endcaps

Endcaps are diecast aluminum, available in luminous sculpted (standard) or flat (optional).

#### Electrical

Factory pre-wired to section ends with quick-wire connectors.

#### Approvals

Certified to UL, CSA and IES standards.

#### Finish

High quality powder coated, available in matte white, black or titanium silver. Other factory and custom colors available on request.

#### Environment

Rated for dry or damp locations in operating ambient temperatures 0-40°C (32-104°F). Certain luminaire components may be adversely affected by contaminants. Damage caused by sulfur, chlorine, petroleum based solutions or other contaminants are not covered under warranty.

Due to continuing product improvements, Philips Ledalite reserves the right to change the specifications without notice.

