


Shine™



Recessed

20"x2'

3 T8



Project Name

Spec Type

Notes

Order Guide

Some combinations of product options may not be available. Consult factory for assistance with your specification.


3352			T317					
Product Series & Size Shine 20"x2'	Version NN Standard T-Grid*	Configuration ST Standalone	Lamping 3 T8 (17W)	Housing S Standard (22ga.)	Wiring 1 1 cct 2 2 cct 5 1 cct w/ Battery Pack 7 1 cct Dimming	Voltage 1 120V 2 277V 3 347V	Ballast E Standard Ballast	
					Consult website for complete list of standard wiring options		Consult website for ballast manufacturer information	

Upgrades & Accessories


Please indicate with check mark.

<input type="checkbox"/> Lamps Included	<input type="checkbox"/> Lamps Included & Installed
<input type="checkbox"/> Job Pack	<input type="checkbox"/> Flex Whip
<input type="checkbox"/> Response Daylight For details visit www.ledalite.com/response	

Cross Section

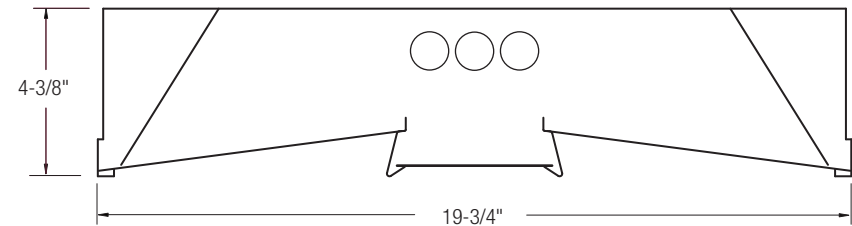


Side View

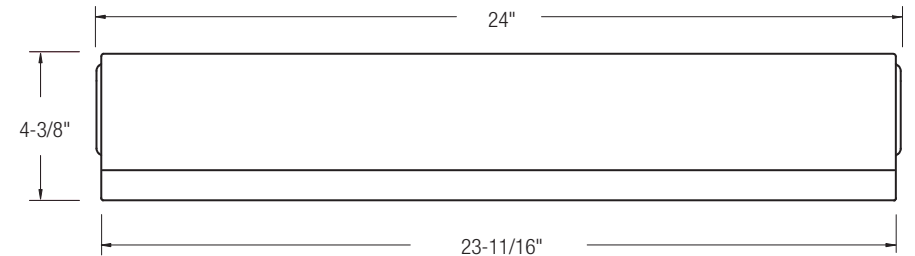

Shine™

Recessed
20"x2"
3 T8



Photometry


Report Summary

Report # 9901786
Filename 3352D1T317.ies
Efficiency 71.8%

Spacing Criteria 1.2 @ 0° along
1.26 @ 90° across

Candela Distribution

Vertical Angle	Horizontal Angle					Zonal Lumens
	0	22.5	45	67.5	90	
0	1092	1092	1092	1092	1092	106
5	1085	1087	1088	1092	1092	299
15	1039	1048	1056	1076	1078	453
25	951	974	986	1009	1000	535
35	809	849	855	882	865	526
45	637	681	681	705	693	431
55	457	480	473	509	483	288
65	275	292	286	301	278	137
75	126	138	121	129	119	27
85	20	24	16	21	18	
90	0	0	0	0	0	

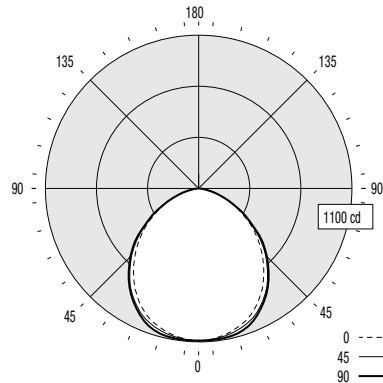

Coefficients of Utilization (%)

Ceiling: Wall:	80				70				50				0			
	70	50	30	10	70	50	30	10	70	50	30	10	70	50	30	10
0 RCR	85	85	85	85	83	83	83	79	79	79	79	71				
1	78	75	73	70	77	74	71	71	69	67	61					
2	72	66	62	58	70	65	61	62	59	56	52					
3	66	58	53	49	64	57	52	55	51	47	44					
4	60	52	46	41	59	51	45	49	44	41	38					
5	56	47	40	36	54	46	40	44	39	35	33					
6	51	42	36	31	50	41	36	40	35	31	29					
7	48	38	32	28	46	38	32	37	31	27	26					
8	44	35	29	25	43	34	29	33	28	25	23					
9	41	32	26	22	40	32	26	31	26	22	21					
10	39	30	24	20	38	29	24	28	24	20	19					

Based on a floor reflectance of 0.2

Avg. Luminance (cd/m²)


Vertical Angle	Horizontal Angle		
	0	45	90
55	2815	2913	2975
65	2299	2391	2324
75	1720	1652	1624
85	811	649	730

IES files for this and other photometric options can be downloaded online at www.ledalite.com

Additional Information


Mounting

Integrates with most common T-bar ceiling types.



Flat T-Grid

Works with 9/16" and 15/16" flat T-grid ceilings.




Slot T-Grid

Can also be used with slot T-grid ceilings, but it will not sit flush with the bottom of the T-bar.

Ceiling Types

Integrated mounting tabs can be field-adjusted to various T-bar ceiling heights for fastening directly to the T-bar grid and/or tied-off to the building structure.

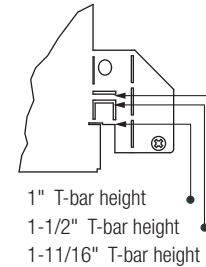

1" T-bar height
1-1/2" T-bar height
1-11/16" T-bar height

Specifications

Due to continuing product improvements, Ledalite reserves the right to change specifications without notice.

Housing

Die-formed, post-painted, 22 gauge cold-rolled steel. Wire entrances are positioned on the side of the housing to allow easy wiring access for the installer. Multiple wire entrances are available on top or side to allow continuous row mounting of fixtures. Maintenance can be performed from below the ceiling without tools. No hardware is visible.

Weight

Maximum 23 lbs.

Optical System

Optical system consists of highly reflective painted interior reflectors and three flat acrylic lenses with 95% transmittance.

Mounting

Fixture is compatible with most common T-bar ceiling types. Integrated tabs are provided for different T-grid heights.

Works with 9/16" and 15/16" standard T-grid ceiling systems. Can also be used with slot T-grid ceiling systems but fixture will be slightly regressed above the T-bar.

Ballast

Electronic. Supplied with pre-installed ballast disconnect as per national electric codes.

Wiring

Fixtures are factory pre-wired and tested for all circuits and emergency battery packs; all leads pulled to a side access with cover plate. Optional armored cable flex whips are supplied in 6' lengths. Armored cable flex connectors are supplied in 9' lengths for standard master/satellite configurations.

Approvals

Certified to UL & CSA Standards.

Finish

Housing and Frame: Post-painted, high quality powder coat. Available in white.