

Linear

TruGroove perimeter graze

2100 lm/4ft
3000/3500/4000K



Project: _____
Spec Type: _____
Catalog No: 4909LxGP
Qty: _____
Line Notes: _____

Placing emphasis where it belongs... Philips Ledalite brings you the latest high performance lighting solution for your designer toolbox, TruGroove LED perimeter ambient and graze. Whether your desire is to set the mood or create a statement, TruGroove lets you emphasize with illumination.


Ordering guide

Product Type	Source	Color Temp *	Lumens *	Optics	Housing	Ceiling / Trim	Run Length	Wiring †	Voltage	Driver
4909	L		G	P	S					
TruGroove Perimeter Graze	L LED	A 4000K B 3500K C 3000K	D 4100 lm/4ft E 3000 lm/4ft G 2100 lm/4ft K 1400 lm/4ft	P Reverse Parabolic Optic w/ Flush Lens	S Standard C Chicago Plenum	N All Ceiling Trims <i>Refer to separate slot & ceiling trim selection.</i>	02 2ft 03 3ft 04 4ft 05 5ft 06 6ft 08 8ft XX Total wall length from 2ft (to 1/8")	7 1cct Dimming	1 120V 2 277V 3 347V	E Philips Advance 0-10V (1% dim) <i>Other drivers available - consult your Philips representative</i>


* Nominal values within a range. Consult photometry data for color temp, lumens & distribution of chosen configuration.

† Not all wiring types are available with all configurations. Consult Philips Ledalite for a complete list of available options.

Endsets (Left/Right) -



C Variable/Wall endplate



S Fixed/Pocket endplate (S)

Slot & Ceiling Trim -

Slot Height	Slot Panel	Ceiling Trim
2 1.75"	S Standard Solid	1 T-Grid
4 4"	A Air Return**	3 Drywall Trimless
		4 Drywall Trim

** Air Return is only available with a 4" slot height and T-Grid ceiling trim (e.g. 4A1)

TruGroove Perimeter Graze

2100 lm/4ft

3000/3500/4000K

Optical System

Ambient: An extruded flush lens assembly with MesoOptics film is used to homogenize and control light from a linear array of downward-facing LEDs. This delivers a uniform, discreet ambient 'glow' along the top of a wall as well as directing fill light into the space.

Graze: A highly efficient parabolic reflector mounted in the reverse orientation from the wall focuses light from an angled array of LEDs into a tight linear beam. This creates dramatic grazing shadow effects down the length of a textured wall with textures 1/16" - 1" deep.

Slot & Trim

Lit modules are regressed into a provided slot, 4" deep as standard or 1.75" deep for narrow plenums. The standard slot avoids direct view of the optics when standing 3' or more from a 9' wall. Slot panels are available to integrate with T-grid or drywall ceilings. The drywall edge can be finished with either a supplied visible extruded aluminum trim or a mud-in 'trimless' flange.

Ends & Corners

The perimeter slot can be terminated at a chosen position with a flat / pocket end; or at a feature or wall with a variable length / wall end containing a sliding panel to close the plenum. All corners are variable length, with sliding panels and trimmable covers, available in 90° inside or outside versions. Other angles may be handled by request.

Housing

Precision aluminum extrusion, powder coated in white (Ambient) or black (Graze).

Weight

Maximum: Ambient 3.6lb/ft, Graze 3.8lb/ft

Electrical

Factory pre-wired to section ends with quick-wire connectors.

Standard Driver

Philips Advance Xitanium 0-10V, 1-100%. Class 2 rated output. Consult Philips Ledalite for other available drivers.

Standard Battery Pack

Philips Bodine, 90 min, 10W, Class 2 rated output, Emergency lumen output = 10W x luminaire efficacy x 1.1. Typical output: 1100lm. Available in ambient version.

Lumen Maintenance

LEDs have been tested by the manufacturer in accordance with IESNA LM-80-08. At an ambient temperature of 25°C, the LED lumen maintenance expectation according to IES TM-21-11 Reported methodology is: L80 (12k) >72,000 hrs.

Source Color

LEDs rated for color rendering CRI >80, R9 >0 and fixture to fixture color accuracy within 2 SDCM.

Mounting

Modules are supported on the wall side by a hidden extruded aluminum rail. On the ceiling side, support and final height adjustment are provided by an aircraft cable and gripper system attached to a bracket on the ceiling structure. Slot panels for closing the plenum are attached using either clips in the case of T-grid ceiling, or a screw mounted finishing trim for drywall.

Joints

Self-aligning joining system with hands-free pre-joining wire access.

Approvals

Certified to UL, CSA and IES standards.

Warranty


Philips indoor professional luminaires 5 year LED warranty: <http://www.philips.com/warranties>

Environment


Rated for dry or damp locations in operating ambient temperatures 0-40°C (32-104°F). Certain luminaire components may be adversely affected by contaminants. Damage caused by sulfur, chlorine, petroleum based solutions or other contaminants in the area of operation are not covered under warranty. Not suitable for natatorium environments.

Due to continuing product improvements, Philips Ledalite reserves the right to change the specifications without notice.

Corners (grid shown)








Inside Corner



Outside Corner

Ceiling Trims




TruGroove Perimeter Graze


2100 lm/4ft

3000/3500/4000K


Dimensions

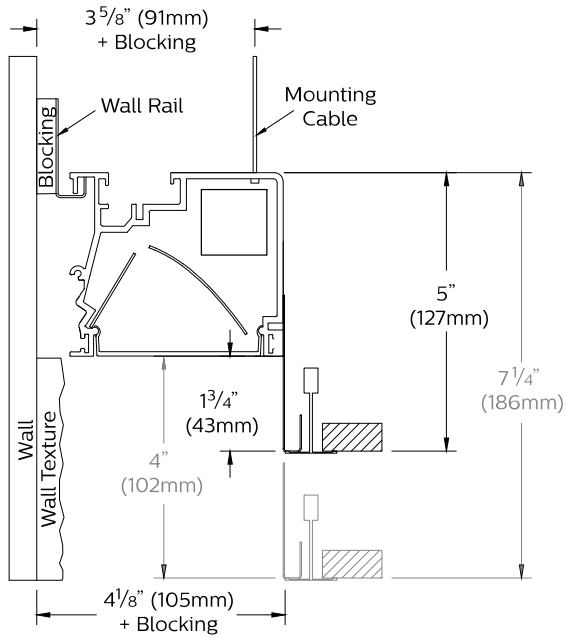


Modules

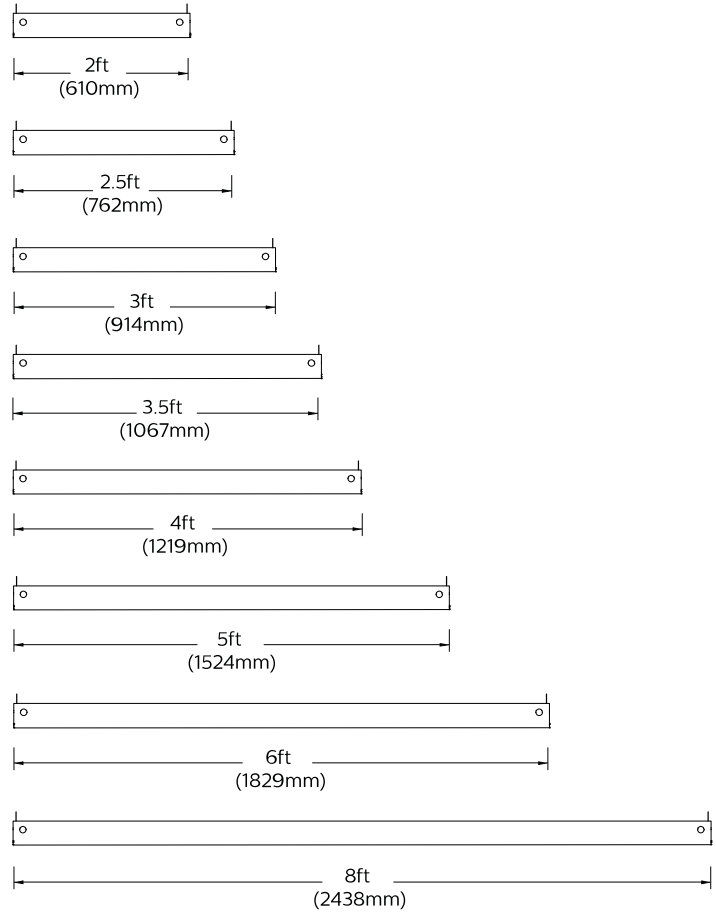

Side View



Top View




Power feed location available on room side 1- $\frac{3}{8}$ " (35mm) from each joint or end condition.

TruGroove Perimeter Graze

2100 lm/4ft

3000/3500/4000K

Photometry - 3500K

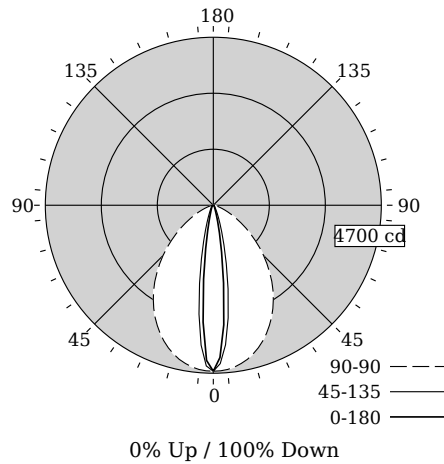

Candela Distribution

Vertical Angle	Horizontal Angle				Zonal Lumens
	0	22.5	45	67.5	
0	4643	4643	4643	4643	0
5	3359	3921	4612	3927	332
15	467	1147	4305	1048	452
25	99	269	3711	283	143
35	54	99	2912	131	79
45	28	55	1991	74	44
55	19	35	1114	44	24
65	14	25	458	27	13
75	8	14	129	14	6
85	2	3	16	3	2
90	0	0	0	0	0
95	0	0	0	0	0
105	0	0	0	0	0
115	0	0	0	0	0
125	0	0	0	0	0
135	0	0	0	0	0
145	0	0	0	0	0
155	0	0	0	0	0
165	0	0	0	0	0
175	0	0	0	0	0
180	0	0	0	0	0

Fixture photometry has been conducted in accordance with IESNA LM-79-08

IES files for this and other photometric options can be downloaded online at www.lightingproducts.philips.com

Coefficients of Utilization (%)

RCR	Ceiling/Wall										
	70	50	30	10	70	50	30	50	30	10	0
0	119	119	119	119	116	116	116	111	111	111	100
1	112	109	106	104	110	107	104	103	101	99	91
2	106	100	95	91	103	98	94	95	91	88	83
3	99	92	86	81	97	90	85	88	83	79	75
4	94	85	79	74	92	84	78	81	76	72	69
5	88	79	72	67	87	78	72	76	71	66	64
6	84	74	67	62	82	73	66	71	66	61	59
7	79	69	62	58	78	68	62	67	61	57	55
8	75	65	58	54	74	64	58	63	58	54	52
9	72	61	55	51	71	61	55	60	54	50	49
10	68	58	52	48	67	58	52	57	51	48	46

Avg. Luminance (cd/m2)

Vertical Angle	Horizontal Angle		
	0	45	90
55	347	20479	434
65	353	11424	314
75	321	5256	256
85	190	1904	190

Distribution

Hemisphere	0% Up / 100% Down
Spacing Along (0 °)	0.25
Spacing Across (90 °)	1.09
Spacing at 180 °	0.24

Philips Ledalite

LED lighting facts
A Program of the U.S. DOE

Light Output (Lumens) **2136**

Watts **19.3**

Lumens per Watt (Efficacy) **110.67**

Color Accuracy
Color Rendering Index (CRI) **82**

Light Color
Correlated Color Temperature (CCT) **3394 (Bright White)**

2700K 3000K 4500K 6500K

All results are according to IESNA LM-79-2008: Approved Method for the Electrical and Photometric Testing of Solid-State Lighting. The U.S. Department of Energy (DOE) verifies product test data and results.

Visit www.lightingfacts.com for the Label Reference Guide.

Registration Number: F46Z-XZMWPT (3/27/2017)
Model Number: 49X9LBGP
Type: Luminaire - Linear

TruGroove Perimeter Graze

2100 lm/4ft

3000/3500/4000K

Optical Performance

Nominal CCT:	3000K	3500K	4000K
Flux (lm)	2039	2136	2154
Efficacy (lm/W)	107.3	110.7	112.8
Power (W)	19.0	19.3	19.1
CCT (K)	3120	3394	4083
CRI	85	82	84
R9	15	4	10
x	0.4279	0.4108	0.3773
y	0.3995	0.3922	0.3763
Duv	0.0006	0.0006	0.0008

Electrical Performance - 3500K

Input Voltage	120V	277V	347V
Input Power	19.3W	19.2W	19.8W
Input Current	0.17A	0.07A	0.06A
Power Factor	0.964	0.995	0.967
Total Harm. Distortion	14.4%	8.9%	12.0%

Tested values . contact technical support for rated values. Off-state power zero unless certain controls are specified.

