


Vectra



Recessed

2'x2'

2 TT5 (55W)

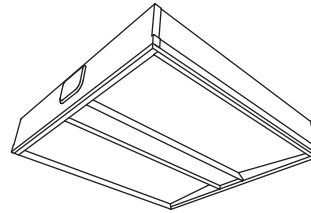

Project Name

Spec Type

Notes

Order Guide

Some combinations of product options may not be available. Consult factory for assistance with your specification.

9722			B255	-		-		-		
Product Series & Size	Version	Configuration	Lamping	Housing	Wiring	Voltage	Ballast			
Vectra 2'x2'	D1 Standard T-Grid D2 Slot T-Grid A1 Air Return on Standard T-Grid A2 Air Return on Slot T-Grid	ST Standalone CR Continuous Row	2 TT5 (55W)	S Standard (22ga.) C Chicago Plenum T Standard w/ Frame Restraint	1 1 cct 5 1 cct w/ Battery Pack 7 1 cct Dimming	1 120V 2 277V 3 347V	E Standard Ballast			
	See details on next page				Consult website for complete list of standard wiring options		Consult website for ballast manufacturer information			

Upgrades & Accessories

Please indicate with check mark.


Lamps Included

Lamps Included & Installed

Job Pack

Flex Whip

Drywall Kit




Not available in continuous row

Can be mounted to wood frame or with hanger wire



Wood Frame




Hanger Wire


Response Daylight

For details visit www.ledalite.com/response

Cross Section

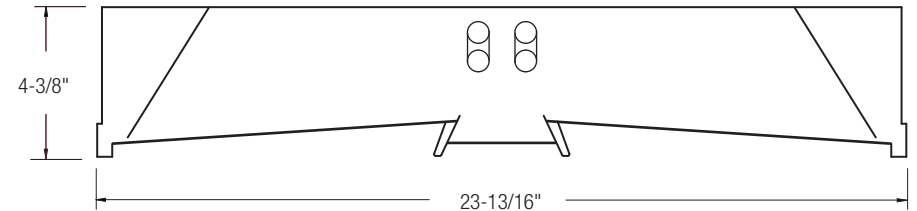


Side View

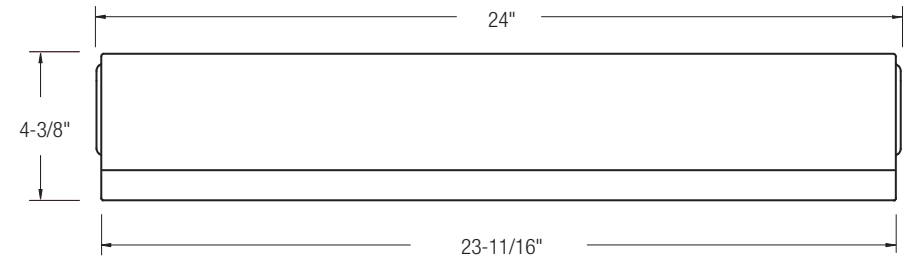

Vectra

Recessed
2'x2'
2 TT5 (55W)



Photometry


Report Summary

Report # 2101765
Filename 9722D1B255.ies
Efficiency 60.4%

Spacing Criteria 1.3 @ 0° along
1.4 @ 90° across

Candela Distribution

Vertical Angle	Horizontal Angle					Zonal Lumens
	0	22.5	45	67.5	90	
0	2229	2229	2229	2229	2229	
5	2220	2228	2242	2263	2267	219
15	2158	2200	2310	2421	2454	656
25	2029	2122	2342	2489	2540	1060
35	1803	1882	2051	2038	2073	1227
45	1435	1384	1434	1385	1415	1085
55	927	843	897	874	908	792
65	462	430	500	506	540	484
75	156	161	224	246	271	229
85	21	24	50	49	69	52
90	0	0	0	0	0	

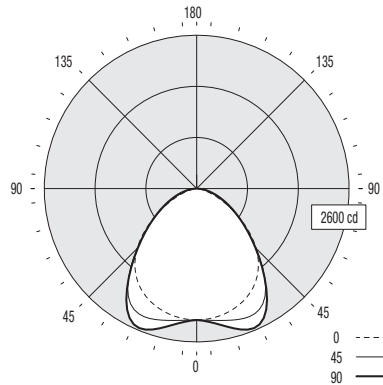

Coefficients of Utilization (%)

Ceiling: Wall:	80				70				50				0			
	70	50	30	10	70	50	30	10	70	50	30	10	70	50	30	10
0 RCR	72	72	72	72	70	70	70	67	67	67	67	67	60	60	60	60
1	66	64	61	59	65	62	60	60	58	57	52	52	52	52	52	52
2	61	56	53	50	59	55	52	53	50	48	45	45	45	45	45	45
3	56	50	46	42	54	49	45	47	44	41	38	38	38	38	38	38
4	51	45	40	36	50	44	40	43	39	35	33	33	33	33	33	33
5	48	40	35	32	46	40	35	38	34	31	29	29	29	29	29	29
6	44	36	31	28	43	36	31	35	31	27	26	26	26	26	26	26
7	41	33	28	25	40	33	28	32	28	24	23	23	23	23	23	23
8	38	30	25	22	37	30	25	29	25	22	21	21	21	21	21	21
9	36	28	23	20	35	28	23	27	23	20	18	18	18	18	18	18
10	33	26	21	18	33	25	21	25	21	18	17	17	17	17	17	17

Based on a floor reflectance of 0.2

Avg. Luminance (cd/m²)


Vertical Angle	Horizontal Angle		
	0	45	90
55	4717	4565	4621
65	3191	3453	3730
75	1759	2526	3056
85	703	1674	2311

IES files for this and other photometric options can be downloaded online at www.ledalite.com

Additional Information


Mounting

Integrates with most common T-bar ceiling types.



D1 Standard T-Grid

Option D1 works with 9/16" and 15/16" flat T-grid ceilings. It can also be used with slot T-grid ceilings, but it will not sit flush with the bottom of the T-bar.




D2 Slot T-Grid

Option D2 is designed to sit flush with slot T-grid ceilings and some tegular tile ceiling types.


Ceiling Types

Integrated mounting tabs can be field-adjusted to various T-bar ceiling heights for fastening directly to the T-bar grid and/or tied-off to the building structure.

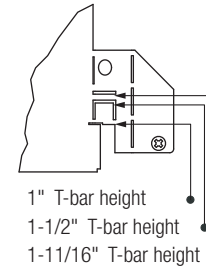

1" T-bar height
1-1/2" T-bar height
1-11/16" T-bar height

Air Return



The air return version features slotted vents along the sides of the fixture. As a result, the installation method of the air return version is different to the standard version, and the fixture cannot be installed in continuous rows.

Specifications

Due to continuing product improvements, Ledalite reserves the right to change specifications without notice.

Housing

Die-formed, post-painted, 22 gauge cold-rolled steel (New York City version is 20 gauge). Wire entrances are positioned on the side of the housing to allow easy wiring access for the installer. Multiple wire entrances are available on top or side to allow continuous row mounting of fixtures. Optional frame restraint is available to provide additional support to the optical frame.

Weight

Maximum 23 lbs.

Optical System

Optical assembly consists of flat acrylic panels and flat acrylic lens. A protected MesoOptics® film layer creates optimal light distribution and high efficiency. The optical frame ends are constructed from die-formed cold-rolled steel assembled together with extruded aluminum profiles in a sturdy frame. The frame is hinged to allow easy access to the inside of the fixture. Maintenance can be performed from below the ceiling without tools. No hardware is visible.

Mounting

Fixture is compatible with most ceiling types. Integrated bend-out tabs are provided for different T-grid heights. Optional drywall kit is available for non-accessible ceilings. Use screws or hanger wire (supplied by others) to secure fixture.

Ballast

Electronic. Supplied with pre-installed ballast disconnects as per national electric codes.

Wiring

Optional flex whips are supplied in 6' lengths for 1x4, 2x2 and 2x4 fixtures. Flex connectors are supplied in 9' lengths for standard master/satellite configurations.

Air Return

Air return option available in 2'x2' and 2'x4' sizes only. Side rails are finished in black.

Approvals

Certified to UL & CSA Standards.
City of Chicago Approved CCEA (housing option C).
Designed to comply with NYC code requirements (Housing Option N).

Finish

Housing and Frame: Post-painted, high quality powder coat. Available in white only.