


# Vectra



Recessed

2'x4'

2 T8



Project Name

Spec Type

Notes




## Order Guide

Some combinations of product options may not be available. Consult factory for assistance with your specification.


<b>9724</b>	<input type="text"/>	<input type="text"/>	<b>T232</b>	-	<input type="text"/>	-	<input type="text"/>	-	<input type="text"/>	-	<input type="text"/>
Product Series & Size	Version	Configuration	Lamping	Housing	Wiring	Voltage	Ballast				
Vectra 2'x4'	<b>D1</b> Standard T-Grid <b>D2</b> Slot T-Grid <b>A1</b> Air Return on Standard T-Grid <b>A2</b> Air Return on Slot T-Grid	<b>ST</b> Standalone <b>CR</b> Continuous Row <b>SMS</b> Standalone Master/Satellite <b>CMS</b> Continuous Row Master/Satellite	2 T8 (32W)	<b>S</b> Standard (22ga.) <b>C</b> Chicago Plenum <b>T</b> Standard w/ Frame Restraint	<b>1</b> 1 cct <b>5</b> 1 cct w/ Battery Pack <b>7</b> 1 cct Dimming	<b>1</b> 120V <b>2</b> 277V <b>3</b> 347V	<b>E</b> Standard Ballast				
	See details on next page				Consult website for complete list of standard wiring options		Consult website for ballast manufacturer information				

## Upgrades & Accessories


Please indicate with check mark.

<input type="checkbox"/> Lamps Included	<input type="checkbox"/> Lamps Included & Installed
<input type="checkbox"/> Job Pack	<input type="checkbox"/> Flex Whip
<input type="checkbox"/> Drywall Kit 	Can be mounted to wood frame or with hanger wire  
<input type="checkbox"/> Response Daylight For details visit <a href="http://www.ledalite.com/response">www.ledalite.com/response</a>	

### Cross Section

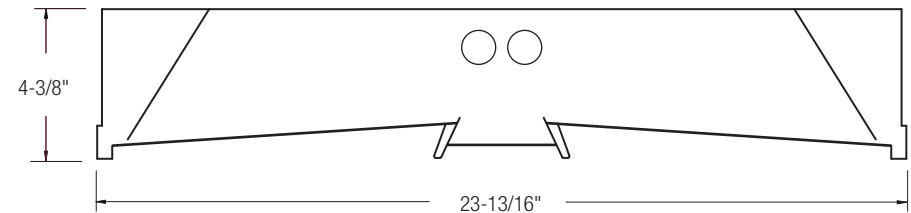


### Side View

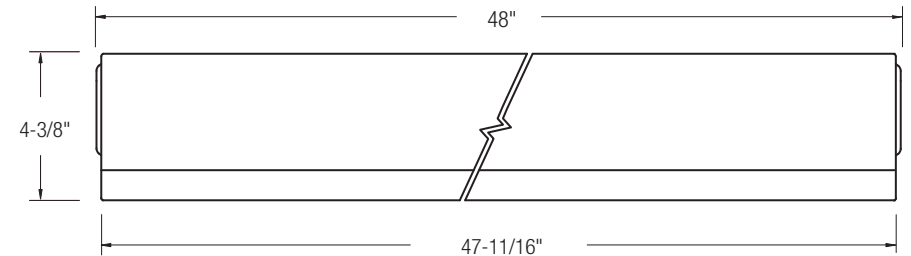

# Vectra

Recessed  
2'x4'  
2 TB



## Photometry


### Report Summary

Report # 2101751  
Filename 9724D1T232.ies  
Efficiency 76.4%

Spacing Criteria 1.3 @ 0° along  
1.4 @ 90° across

### Candela Distribution

Vertical Angle	Horizontal Angle					Zonal Lumens
	0	22.5	45	67.5	90	
0	1761	1761	1761	1761	1761	173
5	1752	1757	1771	1786	1790	513
15	1693	1730	1815	1893	1920	819
25	1587	1663	1820	1906	1943	944
35	1421	1488	1577	1534	1552	839
45	1146	1124	1104	1022	1049	617
55	760	703	689	646	669	382
65	392	380	387	374	391	182
75	136	146	180	182	194	43
85	19	25	45	39	45	
90	0	0	0	0	0	

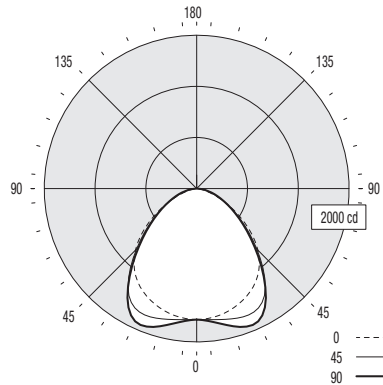

### Coefficients of Utilization (%)

Ceiling: Wall:	80				70				50				0			
	70	50	30	10	70	50	30	10	70	50	30	10	70	50	30	10
0 RCR	91	91	91	91	89	89	89	85	85	85	76					
1	84	81	78	75	82	79	76	76	74	72	66					
2	77	71	67	63	75	70	66	67	64	61	56					
3	71	64	58	53	69	62	57	60	56	52	49					
4	65	57	51	46	64	56	50	54	49	45	42					
5	60	51	45	40	59	50	44	49	43	39	37					
6	56	46	40	35	54	46	39	44	39	35	33					
7	52	42	36	31	51	41	35	40	35	31	29					
8	48	39	32	28	47	38	32	37	32	28	26					
9	45	35	29	25	44	35	29	34	29	25	24					
10	42	33	27	23	41	32	27	32	26	23	21					

Based on a floor reflectance of 0.2

### Avg. Luminance (cd/m<sup>2</sup>)


Vertical Angle	Horizontal Angle		
	0	45	90
55	1894	1717	1667
65	1326	1309	1323
75	751	994	1072
85	312	738	738

IES files for this and other photometric options can be downloaded online at [www.ledalite.com](http://www.ledalite.com)

## Additional Information


### Mounting

Integrates with most common T-bar ceiling types.



D1 Standard T-Grid

Option D1 works with 9/16" and 15/16" flat T-grid ceilings. It can also be used with slot T-grid ceilings, but it will not sit flush with the bottom of the T-bar.




D2 Slot T-Grid

Option D2 is designed to sit flush with slot T-grid ceilings and some tegular tile ceiling types.


### Ceiling Types

Integrated mounting tabs can be field-adjusted to various T-bar ceiling heights for fastening directly to the T-bar grid and/or tied-off to the building structure.

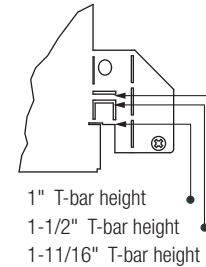

1" T-bar height  
1-1/2" T-bar height  
1-11/16" T-bar height

### Air Return

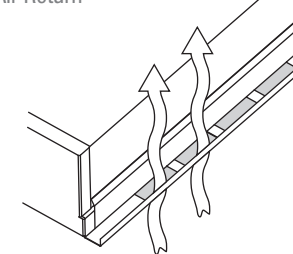

The air return version features slotted vents along the sides of the fixture. As a result, the installation method of the air return version is different to the standard version, and the fixture cannot be installed in continuous rows.

## Specifications

Due to continuing product improvements, Ledalite reserves the right to change specifications without notice.

### Housing

Die-formed, post-painted, 22 gauge cold-rolled steel (New York City version is 20 gauge). Wire entrances are positioned on the side of the housing to allow easy wiring access for the installer. Multiple wire entrances are available on top or side to allow continuous row mounting of fixtures. Optional frame restraint is available to provide additional support to the optical frame.

### Weight

Maximum 40 lbs.

### Optical System

Optical assembly consists of flat acrylic panels and flat acrylic lens. A protected MesoOptics® film layer creates optimal light distribution and high efficiency. The optical frame ends are constructed from die-formed cold-rolled steel assembled together with extruded aluminum profiles in a sturdy frame. The frame is hinged to allow easy access to the inside of the fixture. Maintenance can be performed from below the ceiling without tools. No hardware is visible.

### Mounting

Fixture is compatible with most ceiling types. Integrated bend-out tabs are provided for different T-grid heights. Optional drywall kit is available for non-accessible ceilings. Use screws or hanger wire (supplied by others) to secure fixture.

### Ballast

Electronic. Supplied with pre-installed ballast disconnects as per national electric codes.

### Wiring

Optional flex whips are supplied in 6' lengths for 1x4, 2x2 and 2x4 fixtures. Flex connectors are supplied in 9' lengths for standard master/satellite configurations.

### Air Return

Air return option available in 2'x2' and 2'x4' sizes only. Side rails are finished in black.

### Approvals

Certified to UL & CSA Standards.  
City of Chicago Approved CCEA (housing option C).  
Designed to comply with NYC code requirements (Housing Option N).

### Finish

Housing and Frame: Post-painted, high quality powder coat. Available in white only.