



# Linear

## Verge Wall

2300 lm/4ft 65% Up, Asym.  
3000/3500/4000K



Project: \_\_\_\_\_  
 Spec Type: \_\_\_\_\_  
 Catalog No: 7608LxGQN \_\_\_\_\_  
 Qty \_\_\_\_\_  
 Line Notes: \_\_\_\_\_

Elegant from any angle, Verge delivers exceptional direct/indirect lighting performance in a sleek, geometric design. Offering luminous aesthetics with excellent glare control, Verge is the ideal choice for a wide range of energy-conscious applications.

### Ordering guide

Product Type	Source	Color Temp *	Lumens *	Lower Optics	Upper Optics	Run Length	Wiring †	Voltage	Driver	Finish
7608	L		G	Q	N					
Verge Wall Direct/Ind	L LED	A 4000K B 3500K C 3000K	C 4400 lm/4ft E 3400 lm/4ft G 2300 lm/4ft	Q MesoOptics Lens	N Lightguide	04 4' 08 8' XX Total run length (4' increments)	7 1 cct Dimming E 2 cct A/B Dimming M 1 cct Dimming + EM Wiring N 1 cct Dimming + EM Batt. Pack	1 120V 2 277V 3 347V	E Philips Advance 0-10V (1% dim)	W Standard White T Titanium Silver B Black C Custom

\* Nominal values within a range. Down kits reduce output & efficacy. Consult photometry data for color temp, lumens & distribution of chosen configuration.  
 † Not all wiring types are available with all configurations. Consult Philips Ledalite for a complete list of available options.

### Mounting Hardware

**Mount Type**  
 Consult separate mounting spec sheet for mount type options

### Endcaps -



# Verge Wall

2300 lm/4ft 65% Up, Asym.

3000/3500/4000K

## Optical System

The optical system contains arrays of LEDs edge-lighting a low profile light-guide panel, using total internal reflection to homogenize the sources. The microstructured surface of the panel optimizes light extraction to create an efficacious direct/indirect distribution. Light is purified and controlled by MesoOptics film as it passes through a non-glare acrylic lens. Standard distribution is 75% up / 25% down for suspended and 65% up / 35% down for wall mount version.

## Endcaps

Diecast aluminum endcaps, sculpted to match angled profile.

## Finish

Standard finish is a textured matte powder coat in white, black or titanium silver.

## Housing

Precision formed 18 gauge cold-rolled steel.

## Weight

Maximum: Suspended 3.75lb/ft & Wall 3.0lb/ft.

## Electrical

Factory pre-wired to section ends with quick-wire connectors.

## Standard Driver

Philips Advance Xitanium 0-10V, 1-100%. Class 2 rated output. Consult Philips Ledalite for other available drivers.

## Standard Battery Pack

Philips Bodine, 90 min, 10W, Class 2 rated output. Emergency lumen output = 10W x luminaire efficacy x 1.1. Typical output: 1100lm.

## Lumen Maintenance

LEDs have been tested by the manufacturer in accordance with IESNA LM-80-08. At an ambient temperature of 25°C, the LED lumen maintenance expectation according to IES TM-21-11 is: L<sub>80</sub> (12k) >72,000 hrs (**Reported** methodology).

## Source Color

LEDs rated for color rendering CRI >80 and fixture to fixture color accuracy within 2 SDCM.

## Controls

Suspended version available with the following integrated controls:  
Response daylight sensor (for single zone).

## Mounting

**Suspended:** Tamper-resistant aircraft cable gripper provides unlimited vertical adjustment. Aircraft cable, crimp and cable gripper are independently tested to meet stringent safety requirements.

**Wall:** Fixture is mounted flush to wall using hidden wall brackets which attach to existing structure, variable within 2"-5" of end or joint.

## Joints

Self-aligning joining system with hands-free pre-joining wire access.

## Approvals

Certified to UL, CSA and IES standards. Certain suspended versions without down kits are DesignLights Consortium® qualified. Please see the DLC QPL list for exact catalog numbers ([www.designlights.org/QPL](http://www.designlights.org/QPL)).

## Warranty


Philips indoor professional luminaires 5 year LED warranty: [www.philips.com/warranties](http://www.philips.com/warranties).

## Environment

Rated for dry or damp locations in operating ambient temperatures 0-40°C (32-104°F). Certain luminaire components may be adversely affected by contaminants. Damage caused by sulfur, chlorine, petroleum based solutions or other contaminants are not covered under warranty. Not suitable for natatorium environments.

Due to continuing product improvements, Philips Ledalite reserves the right to change the specifications without notice.

## Dimensions - Cross Section

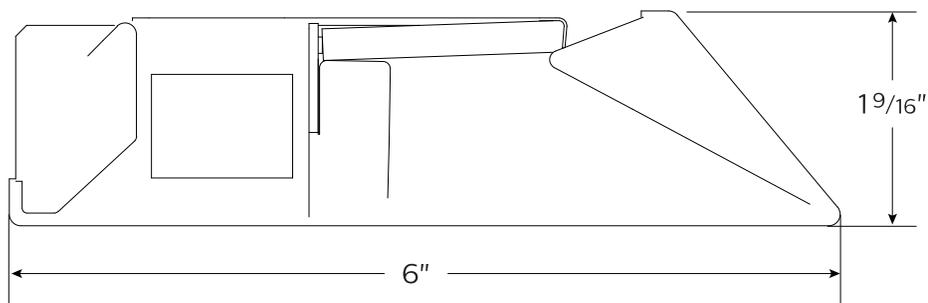

# Verge Wall

2300 lm/4ft 65% Up, Asym.



3000/3500/4000K

---

## Dimensions - Modules

### Modules


Module length excludes end caps. Nominal mounting spacing for individually mounted modules.



Note: Refer to installation instructions for exact mount.

## Optics and Styles

### Lens view

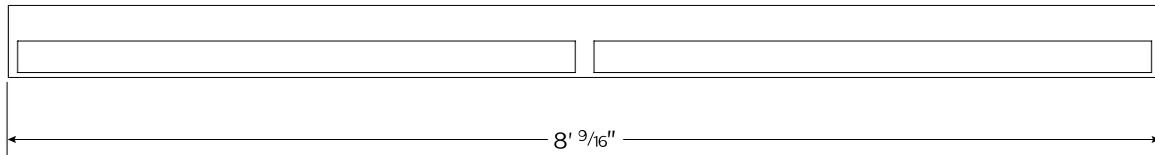


Wall  
(without endcaps)

# Verge Wall

2300 lm/4ft 65% Up, Asym.

3000/3500/4000K

## Photometry - 3500K

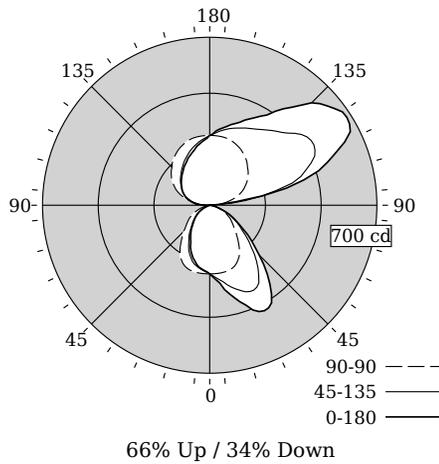

## Candela Distribution

Vertical Angle	Horizontal Angle				Zonal Lumens
	0	45	90	135	
0	286	286	286	286	0
5	313	303	286	275	28
15	399	354	284	253	86
25	489	397	266	207	140
35	451	358	216	150	162
45	293	246	154	101	94
55	167	155	109	66	60
65	92	87	68	31	21
75	32	33	28	0	0
85	4	4	3	0	0
90	0	0	0	0	1
95	38	86	39	48	59
105	409	359	103	88	95
115	624	485	157	121	123
125	678	497	195	147	144
135	604	429	224	172	166
145	478	385	253	198	190
155	397	355	274	226	216
165	348	331	288	254	241
175	311	303	291	278	272
180	291	291	291	291	291

## Values per 4ft unit

Fixture photometry has been conducted in accordance with IESNA LM-79-08

IES files for this and other photometric options can be downloaded online at [www.lightingproducts.philips.com](http://www.lightingproducts.philips.com)

## Coefficients of Utilization (%)

RCR	Ceiling										
	70	50	30	10	70	50	30	50	30	10	0
0	103	103	103	103	93	93	93	74	74	74	34
1	95	91	87	84	85	82	79	66	64	62	29
2	86	80	74	69	78	72	67	58	55	52	25
3	79	70	63	58	71	64	58	51	47	44	22
4	72	62	55	49	65	57	50	46	41	38	19
5	66	55	48	42	60	50	44	41	36	33	17
6	61	50	42	36	55	45	39	37	32	28	15
7	57	45	37	32	51	41	34	34	29	25	13
8	52	41	33	28	47	37	31	31	26	22	12
9	49	37	30	25	44	34	28	28	23	20	11
10	45	34	27	22	41	31	25	26	21	18	10

## Avg. Luminance (cd/m2)

Vertical Angle	Horizontal Angle		
	0	90	180
55	3680	2406	1314
65	2744	2042	629
75	1564	1363	0
85	582	506	0

## Distribution

Hemisphere	66% Up / 34% Down
Peak/Zenith	2.34
Peak Output	681 cd
Glare Control	Meets RP-1-12 recommendations for VDT-Critical spaces

# Verge Wall

2300 lm/4ft 65% Up, Asym.

3000/3500/4000K

## Optical Performance

Nominal CCT:	3000K	3500K	4000K
Flux (lm)	2128	2223	2286
Efficacy (lm/W)	97.2	102.0	105.3
Power (W)	21.9	21.8	21.7
CCT (K)	3045	3312	3931
CRI	84	82	83
R9	10	-1	5
x	0.4338	0.4167	0.3849
y	0.4031	0.3968	0.3837
Duv	0.0000	0.0000	0.0020

## Electrical Performance - 3500K

Input Voltage	120V	277V	347V
Input Power	21.8W	21.9W	22.5W
Input Current	0.18A	0.08A	0.07A
Power Factor	0.991	0.934	0.932
Total Harm. Distortion	10.7%	17.9%	14.0%

Tested values . contact technical support for rated values. Off-state power zero unless certain controls are specified.

