



Linear

FloatPlane Wall LED

Asymmetric
CRI >80 3500K, 3100 lm/4ft



Project: _____
 Spec Type: _____
 Catalog No: 24x8LBEEA _____
 Qty _____
 Line Notes: _____

Interior spaces should resonate, evoke emotion and satisfy a purpose. With FloatPlane LED, it's easier than ever to integrate sleek and sporty style into your layout and within your budget. Fresh and playful with two profile options, Curve and Edge, FloatPlane's performance rivals that of high-end LED luminaires with the affordability of fluorescent.

Ordering guide

Product Type	Version	Source	Color Temp *	Lumens *	Lower Optics	Upper Optics	Run Length	Wiring †	Voltage	Driver	Finish
24		L	B	E	A	A					
24 FloatPlane	G8 Edge Wall R8 Curve Wall	L LED	A 4000K B 3500K C 3000K	C 4200 lm/4ft E 3100 lm/4ft G 2200 lm/4ft	A Acrylic diffuser	A Acrylic diffuser G 75% Down Kit J 100% Down Kit	O4 4' O6 6' O8 8' XX Total run length (2' increments)	1 1 cct 3 1 cct w/ EM cct 5 1 cct w/ BP 7 1 cct w/ Dimming 8 1 cct w/ TW B 2 cct A/B N 1 cct w/ Dim & BP	1 120V 2 277V 3 347V	E Philips Advance Other drivers available - consult factory	W Standard White T Titanium Silver B Black C Custom

* Nominal values within a range. Consult ies file for exact color temp, lumens and up/down distribution † Consult website for complete list of standard wiring options


Mounting Hardware

Wall **Mount Type**
Consult separate mounting spec sheet for mount type options

Endcaps - Edge/Curve

Integrated Controls Please indicate with check mark.

No Options Available

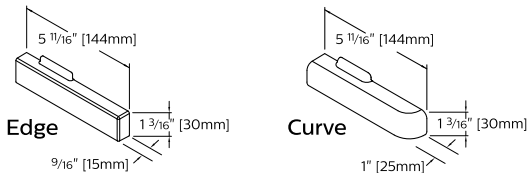

FloatPlane Wall LED

CRI >80 3500K, 3100 lm/4ft

Housing

Precision formed 18 gauge cold-rolled steel. Approx. cross section size: 1.5" h x 8" w (suspended) or 5.7" w (wall mount).

Weight

Maximum: Suspended 3.5lb/ft, Wall 3.3lb/ft

Optical System

White light emitted from dual linear arrays of lateral-facing LEDs is diffused and redirected into the upper and lower hemispheres through a combination of high reflectivity components and acrylic diffusers. This delivers a high efficiency 70% up / 30% down indirect/direct distribution with a wide, homogeneous batwing distribution in the upper hemisphere. Twin polymer diffusers on the lower surface with a combined optical aperture of 5-1/2" deliver a uniform, controlled brightness to maximize visual comfort and luminaire efficacy. Factory or field installable variable optics kits are available to modify the distribution to 75% down or close to 100% down light.

Standard Driver

Philips Advance Xitanium. Output is Class 2 rated. Dimming: 0-10V, 5-100%.

Electrical

Pre-wired to module ends, quick-wire connectors included.

Mounting

Suspended: Rapid installation sling mount at joints and ends. High strength aircraft cable and stainless steel gripper provide unlimited vertical adjustment and are independently tested to meet stringent safety requirements.

Wall: A hidden steel rail and bracket system attaches to the existing structure and supports housings close to the wall. Mount positioning is fully variable along the modules to accommodate site conditions, but should be no more than 4-1/2" ft on center and always within 12" of an end or joint.

Joints

Self-aligning, gasketed joining system. Access panels in the driver channel allow quick and hassle-free wiring of modules either before or after mechanical joints are completed.

Endcaps

Diecast aluminum endcaps in either Edge or Curve versions to match housing.

Finish

High quality powder coated, available in matte white, black or titanium silver. Other custom colors, including Pacific Aqua and Surf Yellow, available on request.

Approvals

Certified to UL, CSA and IES standards.

Lumen Maintenance

Lumen maintenance of the LEDs has been tested by the manufacturer in accordance with IESNA LM-80-08. At an ambient temperature of 25°C, the LED lumen maintenance expectation is:

Suspended: L₈₀ (12k) 70,000 hrs

Wall mount: L₈₀ (12k) 64,000 hrs

according to IES TM-21-11 Addendum A Reported methodology

Warranty

Philips indoor professional luminaires 5 year LED warranty:

<http://www.philips.com/warranties>


Environment

Rated for dry or damp locations in operating ambient temperatures 0-40°C (32-104°F). Certain luminaire components may be adversely affected by contaminants. Damage caused by sulfur, chlorine, petroleum based solutions or other contaminants in the area of operation are not covered under warranty. Not suitable for natatorium environments.

Due to continuing product improvements, Philips Ledalite reserves the right to change the specifications without notice.

Options and Details




Cross Section

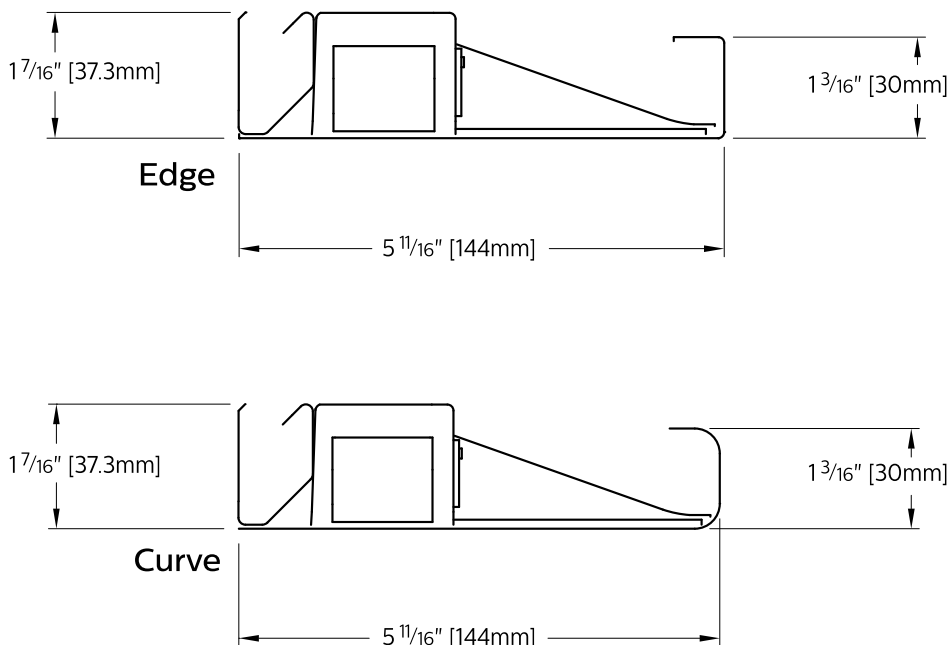




FloatPlane Wall LED

CRI >80 3500K, 3100 lm/4ft

Modules - Edge

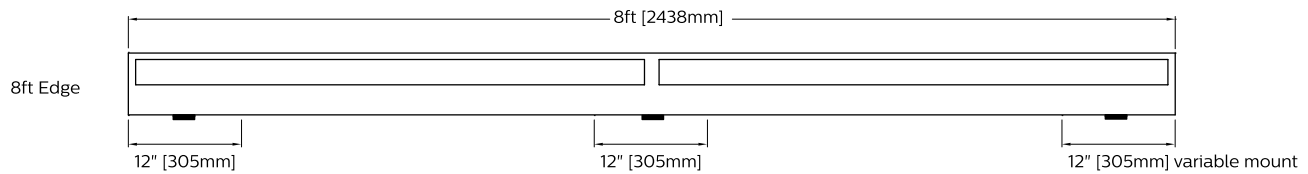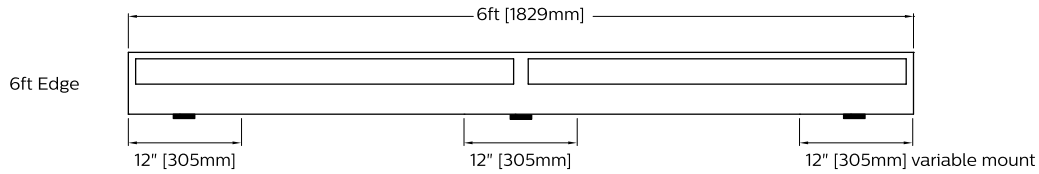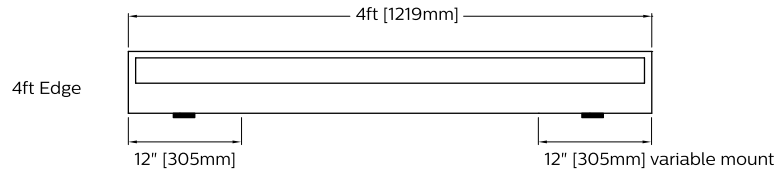


Modules - Curve

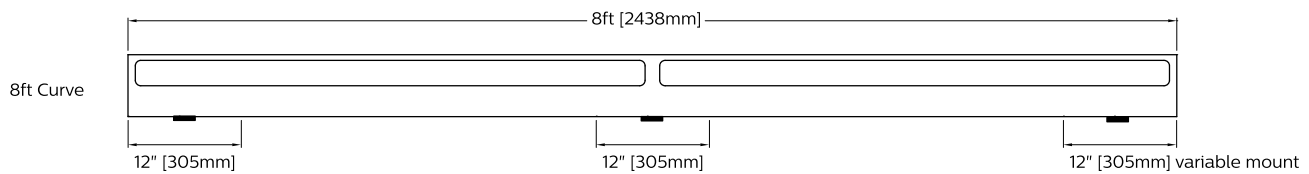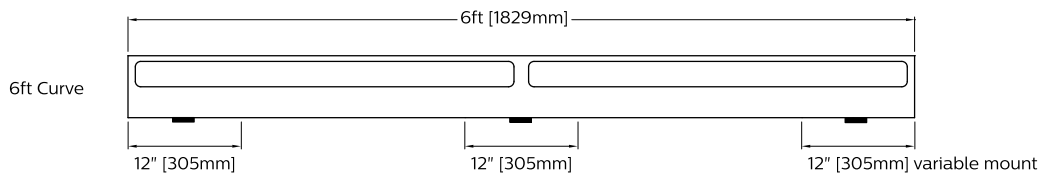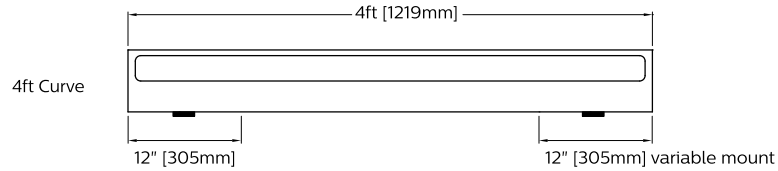

FloatPlane Wall LED

CRI >80 3500K, 3100 lm/4ft

Photometry

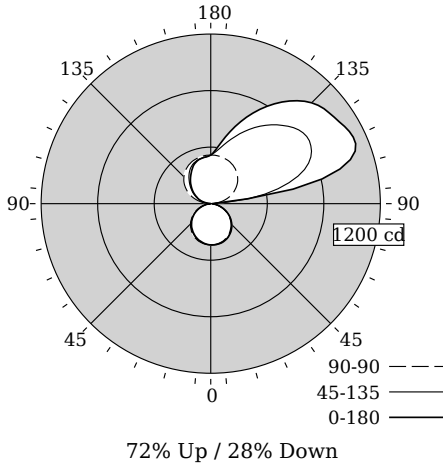

Total Output	3067 lm
Efficacy	118.0 lm/W
CCT	3427K
CRI	82
R9	6
Distribution	72% Up / 28% Down
Peak/Zenith Ratio	3.24
Peak Output	1113 cd @ 115°
Meets RP-1-12 recommendations for VDT-Critical spaces	

Photometry based on 4ft white luminaire. Black, Titanium and Custom color finishes may reduce delivered lumens. Custom color finishes may shift output color temperature.

Fixture photometry has been conducted by an NVLAP accredited testing laboratory in accordance with IESNA LM-79-08

IES files for this and other photometric options can be downloaded online at www.lightingproducts.philips.com

Candela Distribution

Vertical Angle	Horizontal Angle					Zonal Lumens
	0	45	90	135	180	
0	292	292	292	292	292	0
5	292	292	291	289	289	28
15	288	287	282	278	275	80
25	273	271	266	259	256	122
35	246	245	238	231	226	148
45	210	210	203	196	192	156
55	166	165	159	154	150	142
65	116	115	110	106	102	109
75	63	63	59	55	52	62
85	17	17	14	13	11	17
90	11	7	0	0	0	0
95	32	113	31	7	0	74
105	946	573	105	69	64	321
115	1113	781	171	115	108	415
125	1067	829	225	164	155	410
135	1009	774	268	214	201	361
145	878	677	302	266	246	284
155	707	563	324	305	294	196
165	527	452	337	324	323	110
175	380	366	344	334	333	34
180	344	344	344	344	344	0

Coefficients of Utilization (%)

RCR	Ceiling Wall										
	70	50	30	10	70	50	30	50	30	10	0
0	102	102	102	102	91	91	91	71	71	71	28
1	93	89	85	81	83	79	76	62	60	58	23
2	84	77	71	66	75	69	64	54	51	48	19
3	77	68	60	55	68	61	55	48	43	40	16
4	70	60	52	46	62	54	47	42	37	34	14
5	64	53	45	39	57	48	41	38	33	29	12
6	59	47	39	34	52	43	36	34	29	25	10
7	54	42	35	29	48	38	32	30	25	22	9
8	50	38	31	26	45	35	28	28	23	19	8
9	47	35	28	23	42	32	25	25	20	17	7
10	44	32	25	20	39	29	23	23	18	15	7

Avg. Luminance (cd/m²)

Vertical Angle	Horizontal Angle		
	0	90	180
55	4278	4098	3847
65	4050	3855	3562
75	3585	3346	2948
85	2839	2366	1893

Philips Ledalite

Light Output (Lumens) **3067**

Watts **26**

Lumens per Watt (Efficacy) **117.96**

Color Accuracy **82**

Color Rendering Index (CRI)

Light Color **3427 (Bright White)**

Correlated Color Temperature (CCT)

Warm White Bright White Daylight

2700K 3000K 4500K 6500K

All results are according to IESNA LM-79-2008: Approved Method for the Electrical and Photometric Testing of Solid-State Lighting. The U.S. Department of Energy (DOE) verifies product test data and results.

Visit www.lightingfacts.com for the Label Reference Guide.

Registration Number: F46Z-ADYWCA (7/9/2015)
Model Number: 24x8LBEAA
Type: Luminaire - Linear

Electrical Specifications

Input Voltage	120V	277V
Input Power	26W	25.8W
Input Current	0.22A	0.1A
Power Factor	0.998	0.959
Total Harm. Distortion	7.2%	14%
Tested values – contact technical support for rated values. Off-state power zero unless certain controls are specified.		

